

Code: IPC-C26W-BAT

## IP CAMERA **IPC-C26W-BAT** Wi-Fi - 1080p 2.8 mm

Net: **101.82 EUR** Gross: **125.24 EUR**

The wireless IP camera allows you to record events on a micro SD card after motion is detected by the built-in PIR detector. The device allows you to save data to the cloud and remotely access them. Built-in lithium battery Li-Ion enables operation for a period of 2-3 months in places where there is no possibility of connecting cables.

Camera is according to IP65 Index of Protection norm.



### SPECIFICATION

Standard:	TCP/IP
Sensor:	1/3 " CMOS - Hi 3518E V300
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p
Lens:	2.8 mm / F2.0
View angle:	<ul style="list-style-type: none"><li>• 110 ° (manufacturer data)</li><li>• 105 ° (our tests result)</li></ul>
IR illuminator:	✓
Min. illumination:	0.01 Lux (color) 0.01 Lux (B/W)
RS-485 interface:	—
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
ONVIF:	—
Alarm inputs / outputs:	—
Audio:	<ul style="list-style-type: none"><li>• Microphone</li><li>• Speaker</li><li>• Bi-directional audio streaming support</li></ul>
Network interface:	2.4 ... 2.4835 GHz Wi-Fi : IEEE 802.11 b/g/n
Mobile phones support:	<ul style="list-style-type: none"><li>• Android: Free application <a href="#">VicoHome</a></li><li>• iOS (iPhone): Free application <a href="#">VicoHome</a></li></ul>

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Default IP address:	—
Default user password:	—
Web browser access ports:	—
PC client access ports:	—
Main features:	<ul style="list-style-type: none"> <li>• The device supports the cloud, which is also possible to access from the smartphone using the application</li> <li>• Built-in PIR detector - Motion detection recording,</li> <li>• Receive alarm notifications in the application when the camera detects motion,</li> <li>• Alarm signaling via LED and/or siren (it is possible to manually start the alarm)</li> <li>• Video recording to micro SD card with playback possibility</li> <li>• IR illuminator</li> <li>• ICR - Movable InfraRed filter</li> <li>• Live image view</li> <li>• Software update via network</li> <li>• RESET button</li> <li>• The camera is equipped with a magnetic holder</li> </ul>
Power supply:	<ul style="list-style-type: none"> <li>• 2x Li-Ion, 21700 battery - 3.7 V, 4800 mAh</li> <li>• Charging via micro USB port - 5 V / 1 ... 2 A</li> </ul>
Current consumption:	<ul style="list-style-type: none"> <li>• 0.3 mA Standby</li> <li>• 250 / 510 mA Operation - Day/night mode</li> </ul>
Backup time:	2 ... 3 months
Charging time (recover to 100% capacity):	8 ... 10 h
Housing:	Plastic
Color:	White + Black
"Index of Protection":	IP65
Vandal-proof:	—
Operation temp:	-20 °C ... 50 °C
Weight:	0.35 kg
Dimensions:	97 x 63 x 72 mm
Guarantee:	2 years

## PRESENTATION

Front view:



Bottom view:



Side view (visible buttons to open the back cover):



Mounting side view:



View after remove the cover:



Memory card slot and "Reset" button:




The device has 2 brackets in a set: magnetic (magnet in the camera) and traditional, screwed in:





The device has the ability to work with the VicoHome application for mobile devices:

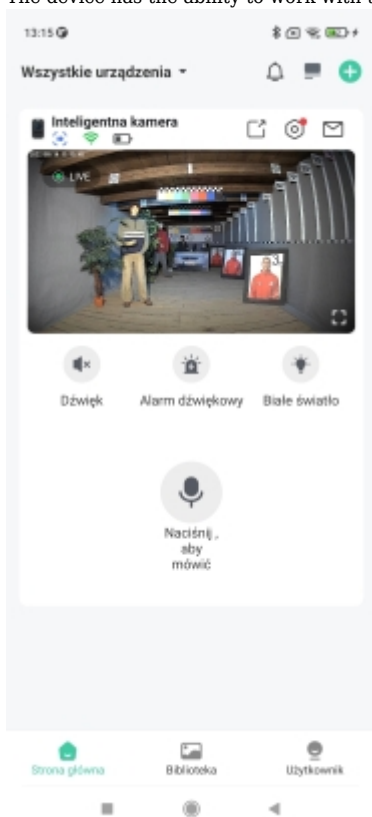

In the kit:



## OUR TESTS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------