

Code: TL-EAP225

ACCESS POINT **TL-EAP225** TP-LINK

Net: **90.99 EUR** Gross: **90.99 EUR**

The TP-Link TL-EAP225 is a device working in MU-MIMO (Multi-User Multiple Input Multiple Output) standard. The MU-MIMO technology allows to optimize data transfer by using multiple transmitters in parallel to connect to several clients simultaneously, taking into account the use of radio wave forming technology (Beamforming - TxBF).

The device is easy to use and manage.



SPECIFICATION

| | |
|--------------------|---|
| Frequency range: | <ul style="list-style-type: none">• 5150 MHz ... 5875 MHz,• 2412 MHz ... 2462 MHz |
| Antenna type: | 3 x Omnidirectional antenna , Integrated - MIMO : <ul style="list-style-type: none">• 2.4 GHz - 3 x 4 dBi,• 5.0 GHz - 2 x 5 dBi |
| Standards: | <ul style="list-style-type: none">• IEEE 802.11ac,• IEEE 802.11n,• IEEE 802.11b,• IEEE 802.11g,• IEEE 802.11a |
| Baud rates: | <ul style="list-style-type: none">• 867 Mbps @ 5 GHz,• 450 Mbps @ 2.4 GHz |
| Protections: | WEP / WPA / WPA2-Personal / WPA2-Enterprise |
| LAN ports: | 1 x 10/100/1000 Mbps |
| Operating system: | Omada |
| Transmitter power: | <ul style="list-style-type: none">• 20 dBm @ 2.4 GHz (max)• 23 dBm @ 5.0 GHz (max) |
| Power supply PoE: | ✓ |
| Power supply: | <ul style="list-style-type: none">• PoE (802.3af),• 24 V / 0.5 A - PoE Adapter, included |
| Power consumption: | 12.6 W |

| | |
|--------------------------------|--|
| Main features: | <ul style="list-style-type: none"> • Possibility to mount on the wall or ceiling • Multi-SSID - max. 16 • Transmit power control • Easy and uniform management system for many devices • Intuitive installation and configuration of many advanced functions • AP placement and RF maps • Wireless transmission statistics • Load balance • Rate limit • Airtime Fairness - technology that improves network performance when multiple clients with different data rates appear in it • Beamforming (TxBF) - technology that allows to create a beam of radio waves in order to improve the quality of connection with client devices located further away from the signal source • Wireless Network Schedule • Reboot schedule |
| Operation temp: | 0 °C ... 40 °C |
| Permissible relative humidity: | 10 % ... 90 % |
| Weight: | <ul style="list-style-type: none"> • 0.36 kg • 0.45 kg (with mounting kits) |
| Dimensions: | 205 x 182 x 37 mm |
| Manufacturer / Brand: | TP-LINK |
| Guarantee: | 3 years |

PRESENTATION

Top view:



Mounting side view:






Ethernet socket view:



PoE Power Supply and Adapter:



In the kit:

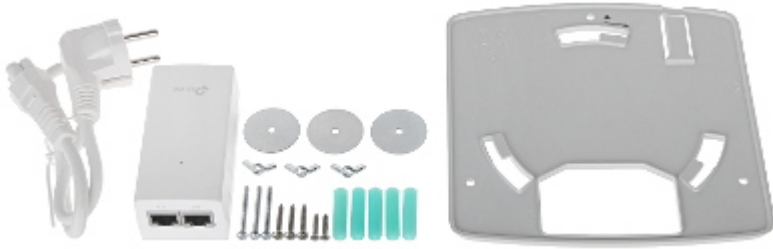

OUR OPINIONS



- Modern and ergonomic design.

PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

