

Code: ALINK-M960

MODEM 4G LTE, MOBILE ROUTER **ALINK-M960** Wi-Fi 150Mb/s

Net: **30.90 EUR** Gross: **30.90 EUR**

Portable LTE hotspot. The device does not require any additional configuration, it is ready to use immediately after placing the SIM card inside and connecting the power supply.

The ALINK-M960 supports the latest generation of 4G FDD/TDD-LTE connections, ensuring a seamless connection to the Internet in most countries and regions. The device allows you to easily share the network connection up to 10 devices simultaneously.



SPECIFICATION

| | |
|-----------------------|--|
| Frequency range: | 2.4 GHz |
| Antenna type: | 1 x WiFi - Internal antenna , 1 x 4G LTE - Internal antenna |
| Standards: | IEEE 802.11 b/g/n, 4G LTE, 3G DC-HSPA+/HSPA/UMTS |
| Baud rates: | <ul style="list-style-type: none">• LTE : 150 / 50 Mbps,• 11n : 300 Mbps,• 11g : 54 Mbps,• 11b : 11 Mbps |
| Network type: | <ul style="list-style-type: none">• 4G : FDD-LTE B1/B3/B7/B8/B20 - 2100 / 1800 / 2600 / 900 / 800 MHz• 4G : TDD-LTE B38/B40 - 2600 / 2300 MHz• 3G : DC-HSPA+/HSPA/UMTS B1/B8 - 2100 / 900 MHz |
| LAN ports: | — |
| Ports: | <ul style="list-style-type: none">• 1 x micro USB - Battery charging• 1 x SIM socket |
| Receiver sensitivity: | <ul style="list-style-type: none">• 11b 11 Mbps : -87.5 dBm• 11g 54 Mbps : -74 dBm• 11n HT20 MCS7 : -70 dBm• 11n HT40 MCS7 : -68 dBm |
| Transmitter power: | < 20 dBm |
| Main features: | <ul style="list-style-type: none">• ON/OFF button• RESET button• LED diodes : GSM, Battery• Transmission encryption : WPA-PSK/WPA2-PSK• MAC addresses filtering• SSID hiding• DHCP server• DHCP client list• Max. number of supported devices : 10• Backup time max. 6 h• Remote management - Web browser• Default address : 192.168.100.1• System requirements : Windows XP/Vista/7/8/10, Mac OS, Android, iOS (iPhone, iPad) |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

| | |
|--------------------------------|--|
| Power supply: | <ul style="list-style-type: none"> • 1800 mAh Battery • 5 V DC / 1 A Charging via micro USB port |
| Operation temp: | 0 °C ... 35 °C |
| Permissible relative humidity: | 10 % ... 90 % (non-condensing) |
| Weight: | 0.042 kg |
| Dimensions: | 98 x 59 x 13 mm |
| Manufacturer / Brand: | ALINK |
| Guarantee: | 2 years |

PRESENTATION



micro USB connector:




Internal view of the housing:





Example captures of device interface:

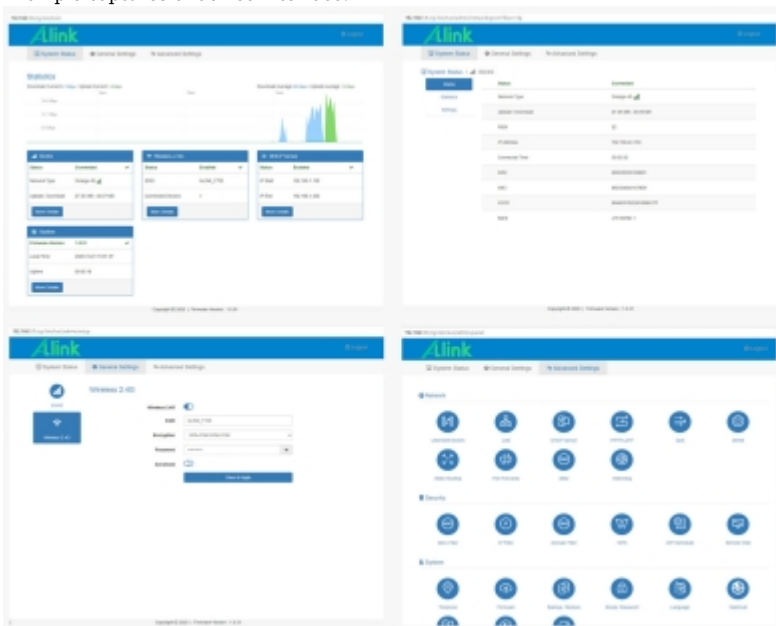

In the kit:



PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|