

Code: TL-WR902AC

# ROUTER TL-WR902AC 2.4 GHz, 5 GHz 300 Mbps + 433 Mbps TP-LINK

Net: 34.77 EUR Gross: 42.77 EUR

The TL-WR902AC mini-size router is ideal for home and travel use. Simple and easy installation and operation. The versatile USB port allows you to share files and connect a 3G/4G modem.

With 433 Mbps wireless speeds over the crystal clear 5 GHz band and 300 Mbps over the 2.4 GHz band, TL-WR902AC offers you the flexibility of 2 dedicated networks and ensures amazing wireless performance. Due to 5 operation modes, the TL-WR902AC is an extremely versatile device.

The TL-WR902AC ensures advanced access control and QoS, its DHCP server supports static assignment of IP addresses.



## SPECIFICATION

Frequency range:	2.4 GHz, 5 GHz
Antenna type:	2 x Integrated, Internal antenna
Standards:	IEEE 802.11 b/g/n @ 2.4 GHz IEEE 802.11 a/n/ac @ 5 GHz
Baud rates:	300 Mbps + 433 Mbps
LAN ports:	1 x 10/100 Mbps (RJ-45)
LED indicators:	Power, INTERNET, WiFi, USB, WPS
Receiver sensitivity:	2.4 GHz : • 11g 54M : -76 dBm • 11n HT20 MCS7 : -74 dBm • 11n HT40 MCS7 : -71 dBm 5 GHz : • 11a 54M : -76 dBm • 11ac VHT20 MCS8 : -70 dBm • 11ac VHT40 MCS9 : -65.5 dBm • 11ac VHT80 MCS9 : -61.5 dBm
Transmitter power:	< 20 dBm @ 2.4 GHz < 23 dBm @ 5 GHz
DDNS:	• No-IP • Comex • DynDNS
DHCP server:	✓
Firmware update:	✓
Operation modes:	• Router, • AP, • Range Extender, • Client, • WISP

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Protections:	<ul style="list-style-type: none"> <li>• WEP, WPA/WPA2</li> <li>• SPI network firewall</li> <li>• Access control</li> <li>• IP-MAC Binding</li> </ul>
Management interface:	Web browser, TP-LINK Tether
Main features:	<ul style="list-style-type: none"> <li>• IPv4/IPv6</li> <li>• parental control</li> <li>• Internet access filtering</li> <li>• WAN : Fixed, or dynamic IP address / PPPoE / PPTP / L2TP</li> <li>• QoS - mechanisms, which provide the high quality of transmission</li> <li>• Port forwarding : Virtual Server, Port Triggering, UPnP, DMZ</li> <li>• IPTV - IGMP</li> <li>• DHCP : DHCP server, DHCP client list</li> <li>• FTP server</li> <li>• RESET button</li> <li>• Mode button</li> <li>• Port USB 2.0</li> <li>• micro USB connector (power)</li> </ul>
Power supply:	<ul style="list-style-type: none"> <li>• 5 V DC / 2 A (power adapter included)</li> <li>• from USB port</li> </ul>
Operation temp:	0 °C ... 40 °C
Permissible relative humidity:	10 % ... 90 % (non-condensing)
Weight:	0.068 kg
Dimensions:	74 x 67 x 22 mm
Manufacturer / Brand:	TP-LINK
Guarantee:	<b>3 years</b>

## PRESENTATION

Top view:



Connectors:

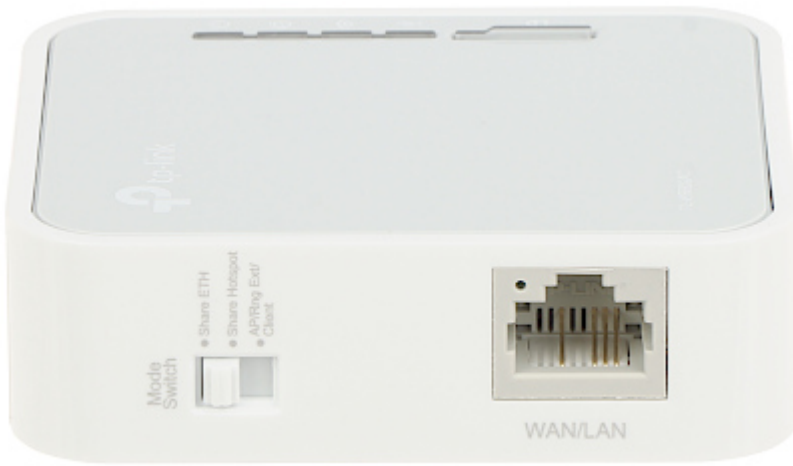

In the kit:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------