

Code: PADP3

## LATCHING PANIC BUTTON PADP3

Net: 15.49 EUR Gross: 19.05 EUR



This button is a device designed to instantly trigger the alarm and (or) initiate the procedure of reporting an emergency situation in protected facility to the monitoring station. If used, the key, after being pressed, will remain in the alarm position (so-called mechanical memory) until it is reset with a special key.

The device can interface with any alarm control panel which supports the NO / NC type detectors.

### SPECIFICATION

Maximum reed switched voltage:	125 V AC
Current:	3 A
Output:	NO/NC
Tamper protection:	24 V DC / 1 A
Main features:	<ul style="list-style-type: none"><li>• button : To activate, press both buttons simultaneously - protection against accidental activation of the alarm, Manual</li><li>• Operation mode : latching / non-latching</li><li>• Reset - by key</li><li>• Built-in parametric resistors EOL: 1 kΩ / 4.7 kΩ / 5.6 kΩ / 6.8 kΩ</li><li>• Surface mount</li></ul>
Safety class:	EN50131-1:2006+A1:2009 Grade 3
Environment class:	II
Housing:	Stainless steel
Color:	Gray + Black
Weight:	0.1 kg
Dimensions:	75 x 62 x 30 mm
Guarantee:	2 years

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60








Rear view:



Internal view of the housing:

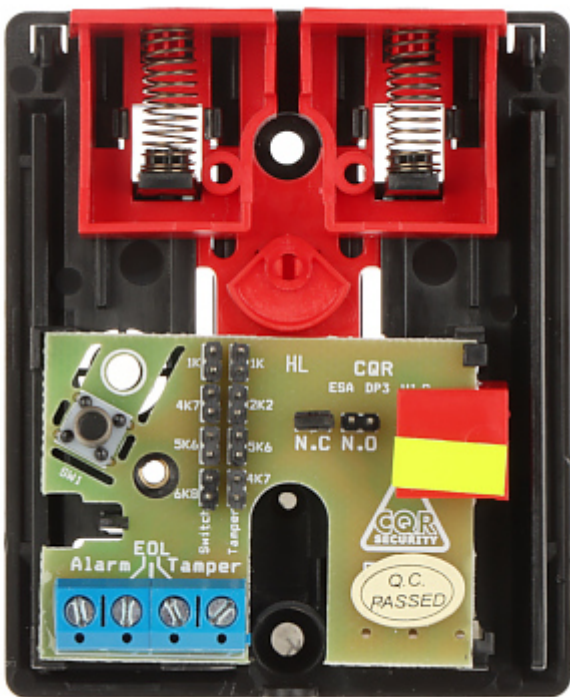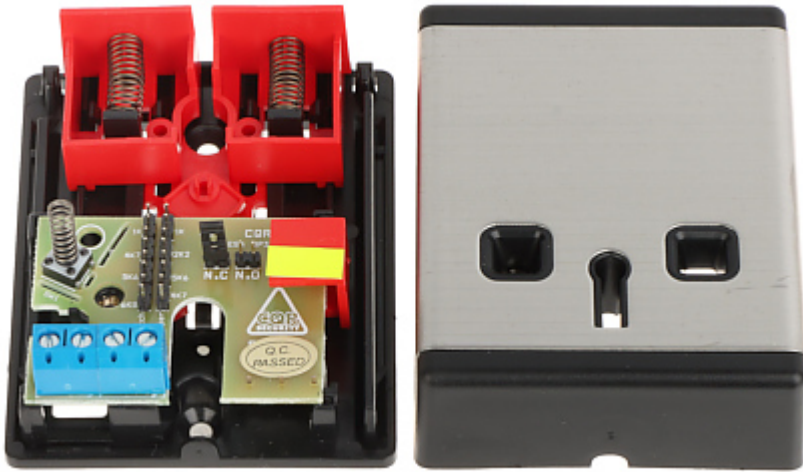

In the kit:

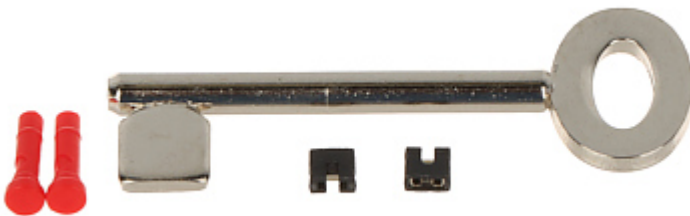

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60