


Code: K-60+2X0.50

## CCTV CABLE **K-60+2X0.50**

Net: **0.35 EUR** Gross: **0.43 EUR**

CCTV specialized cable.

The cable complies with the CPR No. 305/2011 directive and meets the requirements of the PN-EN 50575 European standard which specifies requirements in fire conditions, test methods and rating of cables used as building material. The cable has a Declaration of Performance and a CE marking, which confirm its compliance with the guidelines of the CPR regulation.

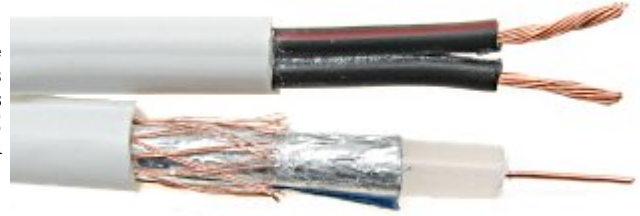

### SPECIFICATION

In section:	100 m . Price for 1m when buying a whole roll
Coaxial cable:	K-60
Inner conductor:	Ø 0.59 mm Cu - Wire
Dielectric:	Ø 3.7 mm PE full
Shield:	Al foil + PET
Braid:	Wire Cu
Impedance:	75 Ω
Outer coating:	Ø 5.5 mm PVC
Cable attenuation at 100m section:	10.6 dB @ 100 MHz 15.2 dB @ 200 MHz 25.4 dB @ 500 MHz 38.9 dB @ 1000 MHz
<b>Electrical cable:</b>	
Inner conductor:	2 x 0.5 mm Stranded wire
Power wires resistance:	4 Ω / 100 m
Guarantee:	2 years

### PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60