

Code: RG-59+2X0.5/ZEL/300

CCTV CABLE **RG-59+2X0.5/ZEL/300**

Net: **0.60 EUR** Gross: **0.60 EUR**

CCTV specialized cable.

Used high density HDPE outer coating is non-toxic polymer, which is characterized by a higher tensile strength, higher melting point and viscosity, and chemical resistance.



SPECIFICATION


In section:	300 m . Price for 1m when buying a whole roll
Coaxial cable:	RG59
Inner conductor:	Ø 0.59 mm Cu - Wire
Dielectric:	Ø 3.7 mm PE full Gel-filled
Shield:	—
Braid:	Stranded wire Cu
Braid density:	70 %
Impedance:	75 Ω
Outer coating:	Ø 6 mm HDPE
Cable attenuation at 100m section:	6.73 dB @ 55 MHz 12.47 dB @ 211 MHz 14.6 dB @ 300 MHz 16.72 dB @ 400 MHz 18.7 dB @ 500 MHz 19.5 dB @ 550 MHz 22.87 dB @ 750 MHz 24.67 dB @ 865 MHz 26.64 dB 1000 MHz
Electrical cable:	
Inner conductor:	2 x 0.5 mm Stranded wire Cu
Power wires resistance:	3.5 Ω / 100 m
Outer coating:	Ø 5.5 mm
Guarantee:	2 years

PRESENTATION

Physical properties of the cable:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

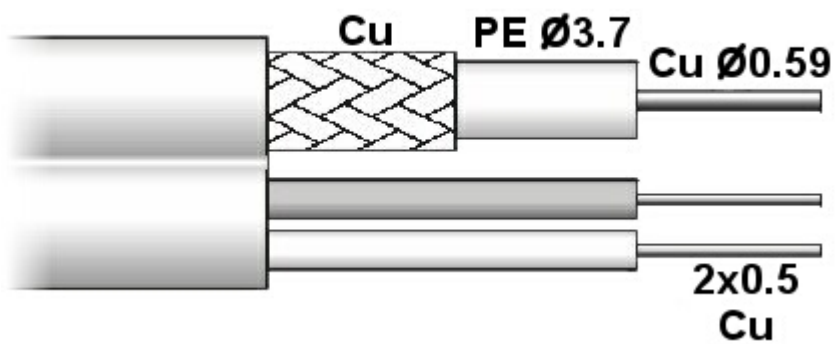

It is sold in 300m rolls:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------