

Code: IPC-HFW3842E-AS-0360B

IP CAMERA **IPC-HFW3842E-AS-0360B** WizSense - 8.3 Mpx, 4K UHD 3.6 mm DAHUA

Net: **400.83 EUR** Gross: **400.83 EUR**

IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 8.3 MPx, 4K UHD.

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install. Thanks to the "Starlight" technology used, the camera only needs very low lighting to obtain a clear color image.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/1.8 " Progressive Scan CMOS
Matrix size:	8.3 Mpx
Resolution:	3840 x 2160 - 8.3 Mpx, 4K UHD , 3072 x 2048 - 6 Mpx , 3072 x 1728 - 5 Mpx , 2592 x 1944 - 5 Mpx , 2688 x 1520 - 4 Mpx , 2560 x 1440 - 3.7 Mpx , 2048 x 1536 - 3 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Lens:	3.6 mm
View angle:	• 87 ° (manufacturer data) • 84 ° (our tests result)
Range of IR illumination:	30 m
Memory card slot:	Micro SD memory cards up to 256GB support (possible local recording)
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Alarm inputs / outputs:	1 / 1
Audio:	• Microphone built-in • External microphone input • Audio output • Bi-directional audio streaming support • Audio detection • Compliance with the AAC standard
Main stream frame rate:	25 fps @ 8.3 Mpx

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4, IPv6, HTTP, TCP, UDP, ARP, RTP, RTSP, RTCP, RTMP, SMTP, FTP, SFTP, DHCP, DNS, DDNS, QoS, UPnP, NTP, Multicast, ICMP, IGMP, NFS, PPPoE, SNMP
WEB Server:	Built-in
Max. number of on-line users:	20
ONVIF:	22.06
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS
Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	192.168.1.108
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
Port ONVIF:	80
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Main features:	• WDR - 120 dB - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • F-DNR (Defog) - Reduction of image noise caused by precipitation • ROI - improve the quality of selected parts of image • NAS - Network Attached Storage support • BLC/HLC - Back Light / High Light Compensation • ICR - Movable InfraRed filter • Day/Night mode (color/b&w/auto) • Auto White Balance • AGC - Automatic Gain Control • Image rotation and mirror • Motion Detection - max. 4 configurable zones • Privacy zones - max. 4 • AFSA - Anti-flicker Self-adaption - The technology eliminates the tiring eyes flickering image effect • AI SSA AI Smart Scene Adaptive - scene auto-adaptation using deep learning algorithms to detect environmental conditions such as rain, fog, backlight, low light and flickering, in order to set the optimal image parameters • SMD 4.0 - searching for an object classified as: human, motor vehicle - increased detection distance and resistance to false alarms • Quick Pick - AI technology enabling, together with the recorder, quick identification of interesting objects (people/vehicles) based on an artificial intelligence algorithm. It allows to extract and compare the colors of clothes and vehicles • IVS analysis : crossing the line (tripwire), intrusion - classification of people and vehicles, scene changing
Housing:	Compact, Metal
Color:	White
"Index of Protection":	IP67
Vandal-proof:	—
Power supply:	• PoE (802.3af), • 12 V DC / 510 mA
Power consumption:	• ≤ 7.5 W @ PoE • ≤ 6.1 W @ 12 V DC
Operation temp:	-40 °C ... 60 °C
Weight:	0.6 kg
Dimensions:	193 x 70 x 66 mm



Supported languages:	Polish, English, Czech, French, Spanish, Dutch, German, Portuguese, Russian, Romanian, Turkish, Ukrainian, Hungarian, Vietnamese, Italian
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION



Side view:



Memory card slot:



Camera mounting side view:




Camera connectors:



Connectors description:






Camera dimensions:

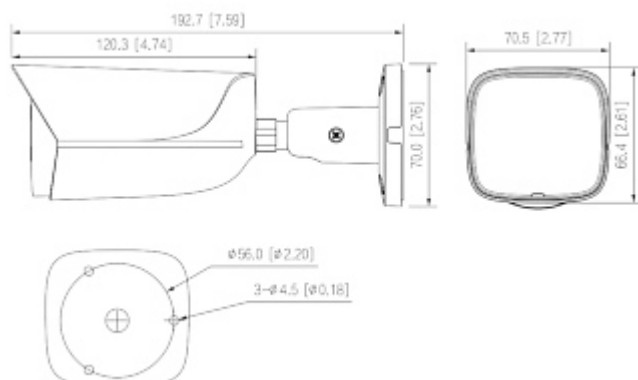


See how to initialize DAHUA cameras:

:

Example captures of device interface:

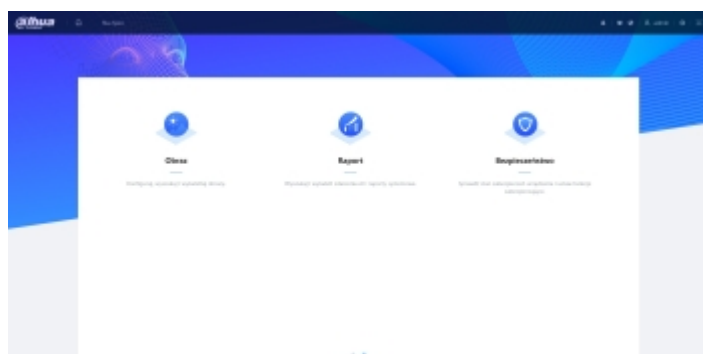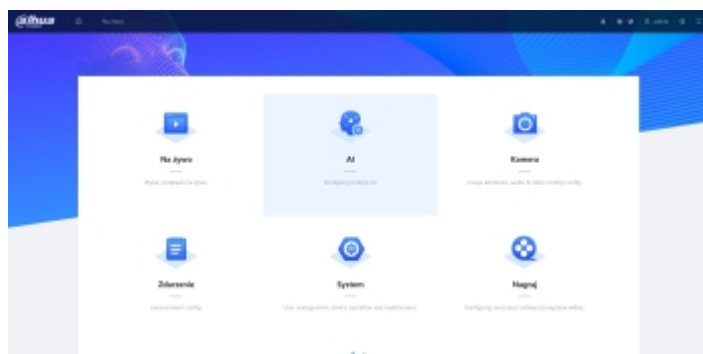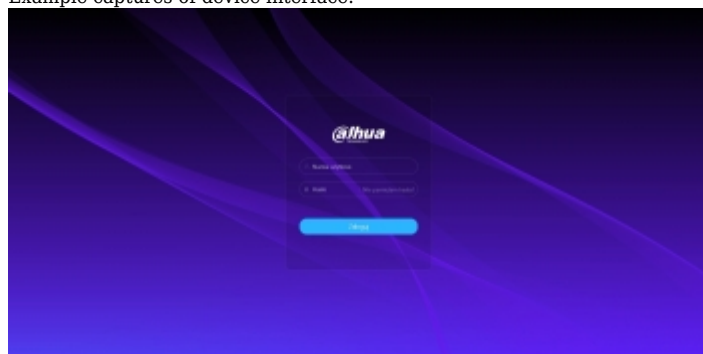

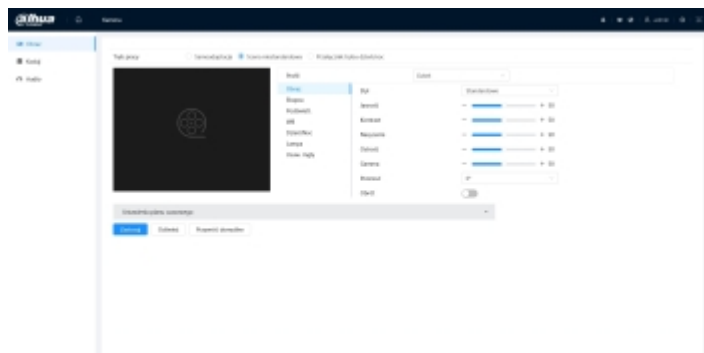

In the kit:



OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

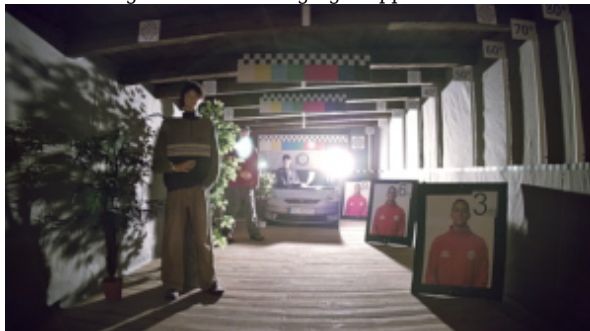

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

