

Code: HPSG2-24V10A-D

BUFFERED SWITCHING POWER SUPPLY ADAPTER **HPSG2-24V10A-D** PULSAR

Net: **165.83 EUR** Gross: **165.83 EUR**

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.

The buffer power supply is designed in accordance with the requirements of the EN50131-6:2017 (Burglary and Assault Signaling Systems) and EN60839-11:2013 (Access Control) standard, grade 1, 2 and II environmental class. The buffer PSU is intended for an uninterrupted supply to devices that require 24V DC (+/-15%).

Please pay attention for proper cooling conditions of the power adaptor during work!



SPECIFICATION

Adapter type:	Switching
Input voltage:	200 V ... 240 V AC
Output voltage:	22.0 V ... 27.6 V (buffer operation) 20.0 V ... 27.6 V (battery operation)
Max. output current (total):	10 A
Battery charging current:	1 A / 2 A / 4 A
Power:	276 W
Number of outputs:	2
Protections:	<ul style="list-style-type: none">• Short-circuit• Overload• Overvoltage• Overvoltage• Tamper - opening the cover• Protection against deep discharge of the battery• Battery output protection against short circuit and reverse polarity connection
Adapter operation control:	<ul style="list-style-type: none">• EPS FLT output - indicating AC power collapse• APS FLT output - No battery or fail battery• AC input voltage presence indication AC• DC output voltage presence indication DC• Battery fault indication• Dynamic battery test• Battery circuit continuity control• Battery voltage control• Battery charge and maintenance control
Main features:	<ul style="list-style-type: none">• Efficiency $\leq 87\%$• START function for manual switch to the battery power supply• Cooling fan system

Supported norms:	<ul style="list-style-type: none"> • EN 50131-6:2017, 1÷2, Grade 2 • EN 60839-11:2013, 1÷2, Grade 2 • PN-83/T-42106 • CE-LVD: EN62368-1 • "Index of Protection" : IP20
Place for battery:	12V/7Ah x 2, 12V/18Ah x 2
Max. battery dimensions:	450 x 190 x 168 mm
Operation temp. / Relative humidity:	-10 ... 40 °C / 20 ... 90 %
Weight:	6.9 kg
Dimensions:	465 x 395 x 173 mm + 14 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years


PRESENTATION

Front view:



Internal view of the housing:



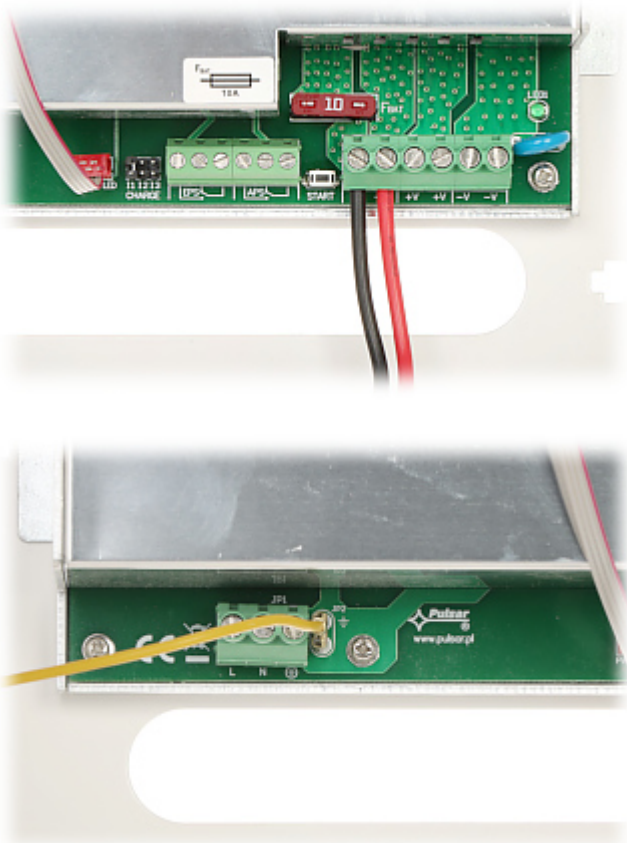

Mounting side view:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60