

Code: MV-524


## MULTISWITCH **MV-524** 5 INPUTS/24 OUTPUTS TERRA

Net: **228.74 EUR** Gross: **228.74 EUR**

Radial multiswitches from MV series are dedicated for medium and large SMATV systems with distribution of SAT IF and terrestrial TV signals, however they can also be used in smaller installations.

The MV-524 multiswitch has an active (amplified) line for terrestrial and satellite TV. The adjustment of the gain (signal level) for each SAT IF and DVB-T lines is made with dedicated switches.

Die-cast housing guarantees high screening efficiency - class A.

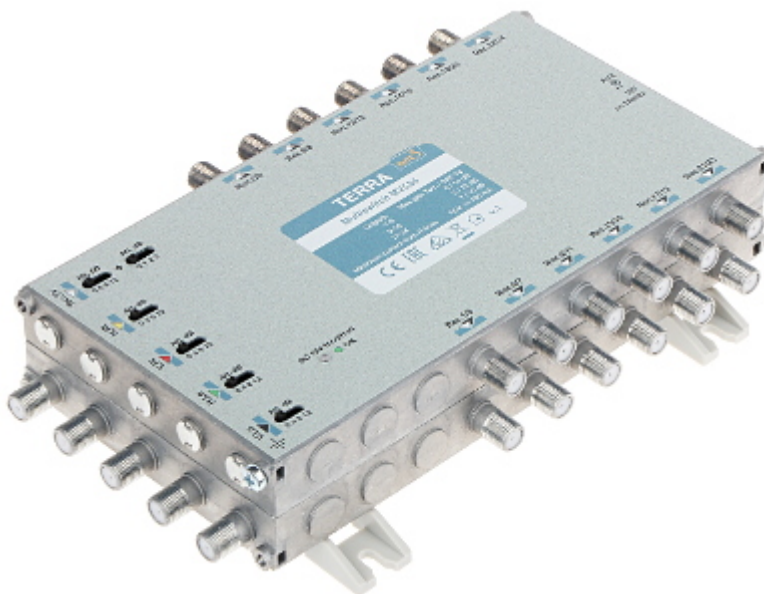

### SPECIFICATION

Inputs:	4x 950 MHz ... 2400 MHz , 1x 47 MHz ... 862 MHz - Active
Outputs:	24x 47 MHz ... 2400 MHz
Switching signals:	14 V / 18 V 0 Hz / 22 kHz
SAT amplification (cable pre-correction):	3 ... 14 dB
TV amplification (cable pre-correction):	-3 ... 5 dB
SAT Gain control:	12 dB by 4 dB step
TV Gain control:	15 dB by 1 dB step
Isolation:	<ul style="list-style-type: none"><li>• Between inputs SAT/SAT <math>\geq 30</math> dB</li><li>• Outputs <math>\geq 27</math> dB SAT</li><li>• Outputs <math>\geq 35</math> dB DVB-T</li></ul>
Maximal output level SAT:	105 dB $\mu$ V
Maximal output level TV:	82 ... 86 dB $\mu$ V
Pre-amplifiers powering:	—
Power supply:	Inputs HL/HH Power adapter 18 V DC / 1 A (not included)
Dimensions:	227 x 135 x 50 mm
Weight:	1.3 kg
Manufacturer / Brand:	TERRA
Guarantee:	2 years

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------