

Code: LR1002-1EC

## EXTENDER ETHERNET+PoE **LR1002-1EC** RECEIVER DAHUA

Net: **51.94 EUR** Gross: **51.94 EUR**

The LR1002-1EC extender allows to increase a distance of transmission of the data and PoE 802.3 at/af, ePoE powering via coaxial cable.  
The device operates from the PoE switch side.



### SPECIFICATION

LAN ports:	1 pcs RJ45
Transmission ports:	1 pcs BNC
Transmission speed:	10 / 100 Mbps Full Duplex
Transmission range:	max. 1000 m @ 10 Mbps , max. 400 m @ 100 Mbps The range of data transfer and power supply is strongly dependent on the cable used and the power required to supply the receiver
Protections:	Overvoltage
Main features:	<ul style="list-style-type: none"><li>• Plug &amp; Play</li><li>• MDI/MDI-X auto detection feature - auto detecting the data transmission mode</li><li>• Support for IP cameras and network devices</li><li>• Easy installation - doesn't require any configuration of IP nor MAC address</li><li>• The device for transmission uses 4 pairs of twisted-pair cable</li><li>• The device operates from the PoE switch side</li><li>• Possibility to mount on a wall, or on the DIN TS-35 rail</li></ul>
Power supply:	<ul style="list-style-type: none"><li>• ePoE</li><li>• PoE (802.3af/at)</li></ul>
Weight:	0.062 kg
Dimensions:	79 x 64 x 23 mm
Manufacturer / Brand:	DAHUA
Guarantee:	<b>3 years</b>


### PRESENTATION

Device connectors:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60




Rear view:

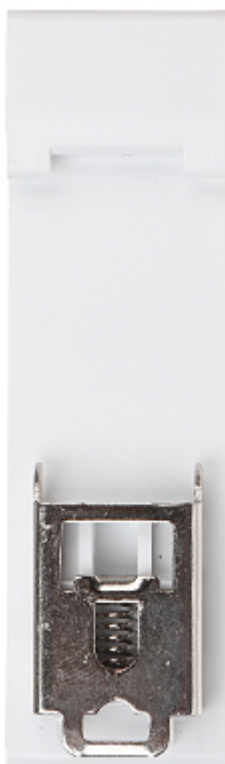

Side view:



Transmission schematic diagram:

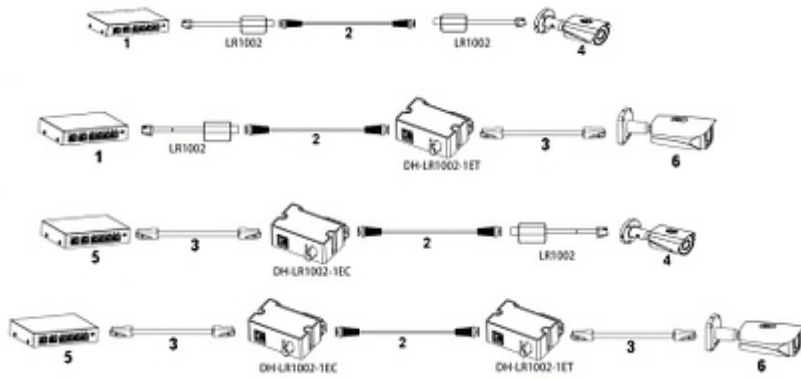

1. ePoE Switch
2. Coaxial cable
3. UTP cat. 5e
4. Camera IP ePoE
5. Switch PoE
6. Camera IP PoE

In the kit:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------