

SET OF UTP / COAXIAL CONVERTERS FOR LAN+POE TRANSMISSION

XCOAX4-SET 2 PCS SET ATTENet: **112.37 EUR** Gross: **112.37 EUR**

The XCOAX4-SET set includes transmitter and receiver modules, it is used for Ethernet data and PoE power supply transmission using coaxial cable.

The devices allow the installation of cameras or other IP PoE devices in places where replacement of the existing cabling is impossible or unprofitable. The xCOAX4-SW module is powered from any PoE switch (RJ45 port) or from a cable terminal and then, via a coaxial cable, enables bi-directional network communication and powering of the xCOAX4-CAM module. The camera or another receiver can be connected to the RJ45 port of the xCOAX4-CAM module at the end of the line.

**SPECIFICATION**

Connectors:	• 1 pcs RJ45 • 1 pcs cable terminal • 1 pcs BNC
LAN ports:	1 pcs RJ45 100 Mbps
LAN+PoE port configuration description:	• xCOAX4-SW : PoE IN - Passive PoE ≤ 30 W, PoE (802.3at) ≤ 30 W, PoE (802.3af) ≤ 15 W ("+-": 1, 2 pins; "+/-": 3, 6 pins) or ("+-": 4, 5 pins; "+/-": 7, 8 pins) • xCOAX4-CAM : Port LAN 10/100Mb or LAN + PoE OUT - PoE (802.3bt) ≤ 60 W, PoE (802.3at) ≤ 30 W, PoE (802.3af) ≤ 15 W
Transmission range:	< 1000 m @ Coaxial cable < 100 m @ xCOAX4-SW - Switch PoE < 100 m @ xCOAX4-CAM - IP Camera
LED indicators:	• PoE • LAN • Link • 10Mb
Protections:	• Overvoltage - LAN, BNC • Short-circuit - xCOAX4-SW
Main features:	• Plug & Play • Support for IP cameras and network devices • Full transparency for networks • Watchdog function - Coaxial cable
Power supply:	xCOAX4-SW : • 10 ... 58 V DC - cable terminal • PoE 802.3af/at / PASSIVE • The output PoE voltage is equal to the input voltage
Power consumption:	1.35 W (total)
Housing:	Plastic (PC)
"Index of Protection":	IP20
Operation temp:	-25 °C ... 65 °C
Weight:	0.033 kg (single element)
Dimensions:	• 73 x 52 x 20 mm - xCOAX4-SW • 73 x 52 x 20 mm - xCOAX4-CAM

Manufacturer / Brand:	ATTE
Guarantee:	3 years

PRESENTATION


Connectors:



Top view:



Connection diagram:

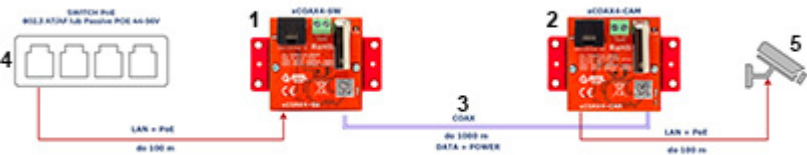

1 - xCOAX3-SW

2 - xCOAX3-CAM

3 - Coaxial cable
Data + Power

4 - Switch PoE
PoE 802.3af/at / PASSIVE

5 - Camera IP PoE
PoE 802.3af/at / PASSIVE
In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60