

Code: EPOC-131HP-O

EXTENDER ETHERNET+PoE **EPOC-131HP-O** I-VIEW

Net: **1.91 EUR** Gross: **1.91 EUR**

The EPOC-131HP-O extender allows to increase a distance of transmission of the data and PoE 802.3 at/af powering via UTP cable or coaxial cable. It can be installed indoors and outdoors.

The device operates from the camera side.



SPECIFICATION

LAN ports:	1 pcs RJ45
Transmission ports:	1 pcs BNC or 1 pcs RJ45
Transmission speed:	10 / 100 Mbps Full Duplex
Transmission range:	max. 1500 m - Range depending on used cable and receiver power
Protections:	128-bit AES encryption
Main features:	• Plug & Play • Support for HTTP • Support for IP cameras and network devices • Easy installation - doesn't require any configuration of IP nor MAC address • Watchdog built-in • For outdoor use • The device for transmission uses 4 pairs of twisted-pair cable • The device operates from the camera side
Power supply:	48 V ... 56 V DC - Option (power adapter not included)
"Index of Protection":	IP66
Weight:	0.470 kg
Dimensions:	132 x 102 x 37 mm
Manufacturer / Brand:	I-VIEW
Guarantee:	2 years

PRESENTATION

Particular elements:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Device connectors:




Rear view:




Transmission schematic diagram:



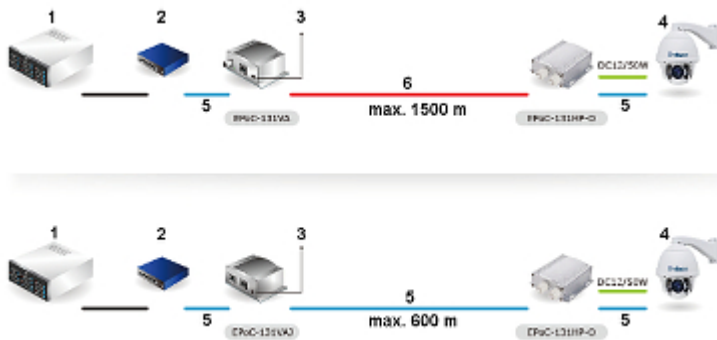

1. NVR
2. Switch PoE
3. DC 48V power supply - option
4. IP Camera
5. Twisted-pair cable
6. Coaxial cable

Max. distance of powering depending on the power:

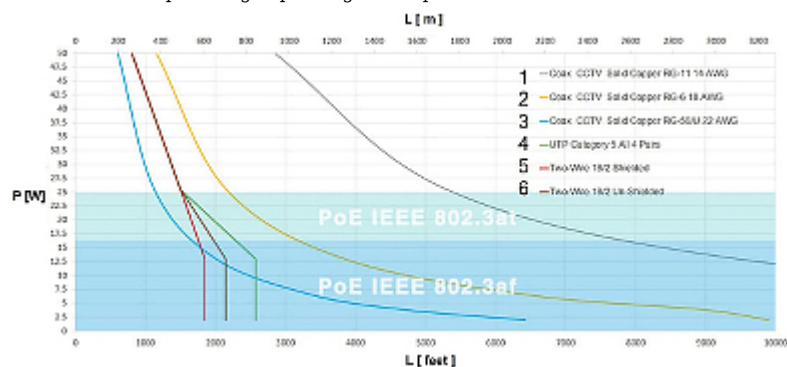

1. Coaxial cable 14AWG
2. Coaxial cable 18AWG
3. Coaxial cable 22AWG
4. Cat. 5 UTP - all 4 pairs
5. Two-wire cable, shielded 18AWG
6. Two-wire cable, unshielded 18AWG

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm

Gross Weight: 0 kg