

Code: TRISET-PLUS

## COAXIAL CABLE **TRISSET-PLUS** Dca LSZH A+

Net: **0.60 EUR** Gross: **0.74 EUR**

The TRISET-PLUS high-quality coaxial cable dedicated to both individual and collective installations. Cable made in LSZH (LS0H) - halogen-free insulation, used where greater safety in the event of fire is required (high-rise residential buildings, public utility buildings).



### SPECIFICATION

In section:	100 m . Price for 1m when buying a whole roll
Coaxial cable:	TRISSET
Inner conductor:	Ø 1.13 mm Cu Wire
Dielectric:	Ø 4.8 mm (physical foam)
Shield:	<ul style="list-style-type: none"><li>• Foil : Al/PET/SY - Internal</li><li>• Foil : Al/PET - External</li></ul>
Braid:	81 % Al wire
Outer coating:	Ø 6.85 mm PVC
Coating color:	White
Minimal bend radius:	70 mm
Impedance:	75 Ω
Capacity:	52 pF/m
Resistance of the inner conductor for DC current:	16.85 Ω/km
Dielectric resistance:	2500 MΩ/km
Screening efficiency:	> 95 dB @30 ... 1000 MHz
Shortening wave coefficient:	84 %
Weight:	41.4 kg/km
Main features:	<ul style="list-style-type: none"><li>• low attenuation</li><li>• perfect matched</li><li>• high screening efficiency</li></ul>
Guarantee:	2 years


### PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Transfer impedance of TRISSET-PLUS in 5-30 MHz range and the requirements for A+ class:

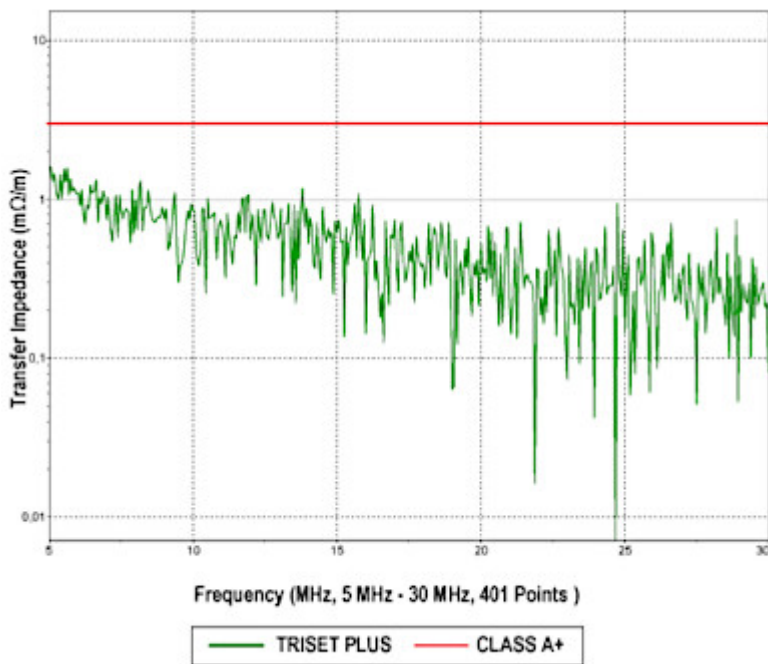

Insertion loss in the 5-2400 MHz frequency range:



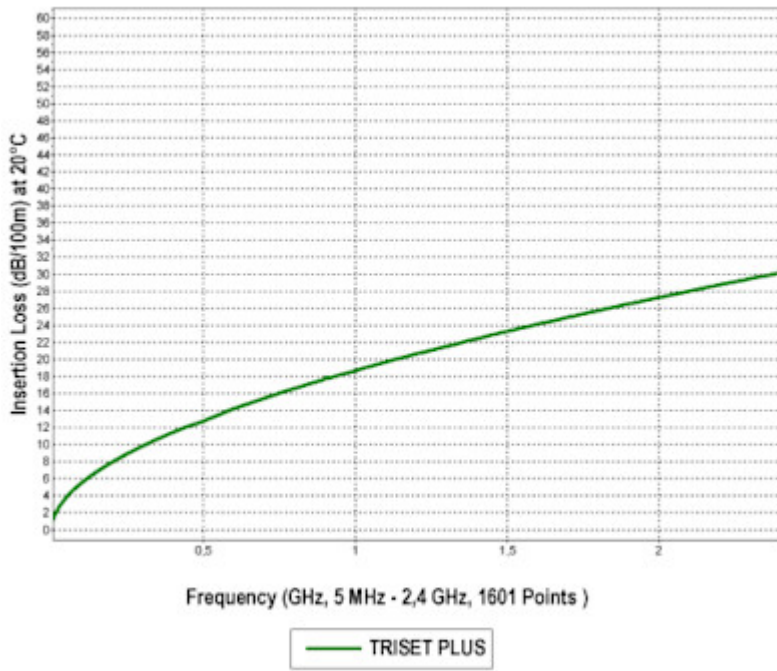

Package:

