


Code: TRISET-PLUS

COAXIAL CABLE **TRISSET-PLUS** Dca LSZH A+

Net: **0.55 EUR** Gross: **0.68 EUR**

The TRISET-PLUS is modern 75 Ω impedance coaxial cable with very good electric and mechanical parameters. For convenience, cable is marking with length counter printed with 1 m distance step. The cable was produced under strict technological discipline, with tight tolerances from nominal parameters.



SPECIFICATION


In section:	100 m . Price for 1m when buying a whole roll
Coaxial cable:	TRISSET
Inner conductor:	Ø 1.13 mm Cu Wire
Dielectric:	Ø 4.8 mm (physical foam)
Shield:	<ul style="list-style-type: none">• Foil : Al/PET/SY - Internal• Foil : Al/PET - External
Braid:	81 % Al wire
Outer coating:	Ø 6.85 mm PVC
Coating color:	White
Minimal bend radius:	70 mm
Impedance:	75 Ω
Capacity:	52 pF/m
Resistance of the inner conductor for DC current:	16.85 Ω /km
Dielectric resistance:	2500 M Ω /km
Screening efficiency:	> 95 dB @30 ... 1000 MHz
Shortening wave coefficient:	84 %
Weight:	41.4 kg/km
Main features:	<ul style="list-style-type: none">• low attenuation• perfect matched• high screening efficiency
Guarantee:	2 years

PRESENTATION


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Transfer impedance of TRISSET-PLUS in 5-30 MHz range and the requirements for A+ class:

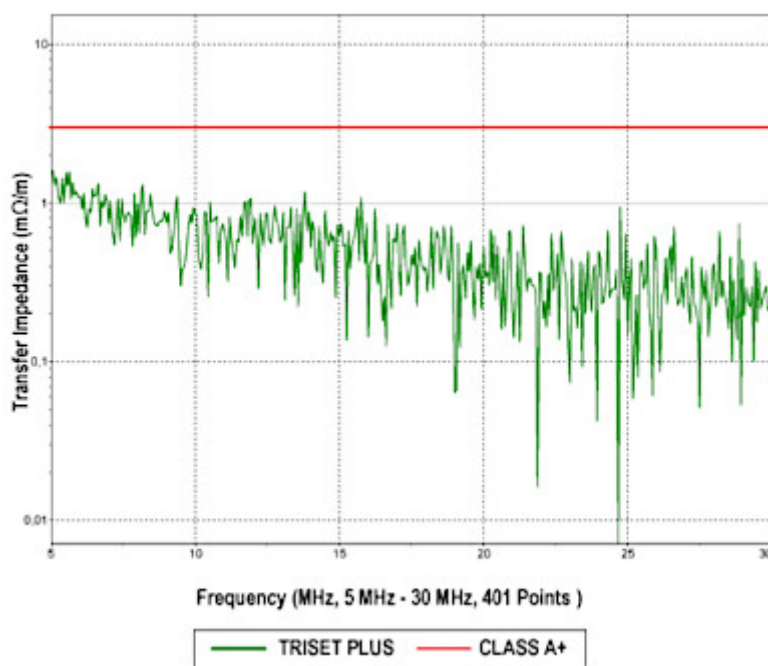

Insertion loss in the 5-2400 MHz frequency range:

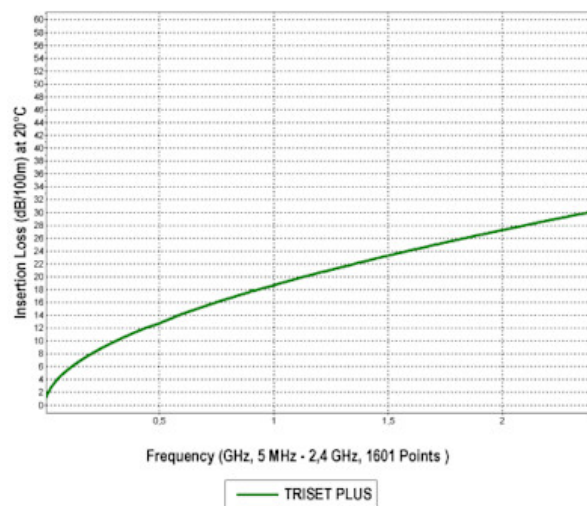

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Package:

