

Code: NS113-TRISHIELD/300

## COAXIAL CABLE NS113-TRISHIELD/300

Net: 0.39 EUR Gross: 0.48 EUR

The cable complies with the CPR No. 305/2011 directive and meets the requirements of the PN-EN 50575 European standard which specifies requirements in fire conditions, test methods and rating of cables used as building material. The cable has a Declaration of Performance and a CE marking, which confirm its compliance with the guidelines of the CPR regulation.




### SPECIFICATION

In section:	300 m . Price for 1m when buying a whole roll
Inner conductor:	Ø 1.13 mm Cu Wire
Dielectric:	Ø 4.8 mm (physical foam)
Shield:	Double Al/PET
Braid:	144 x 0.12 mm Al wire / PET
Outer coating:	Ø 6.8 mm PVC
Coating color:	White
Impedance:	75 Ω
Cable attenuation at 100m section:	4.5 dB @ 50 MHz 6.0 dB @ 100 MHz 13.6 dB @ 500 MHz 17.8 dB @ 800 MHz 19.7 dB @ 1000 MHz 24.4 dB @ 1500 MHz 28.4 dB @ 2000 MHz
Guarantee:	2 years


### PRESENTATION

Cross-section of a cable:

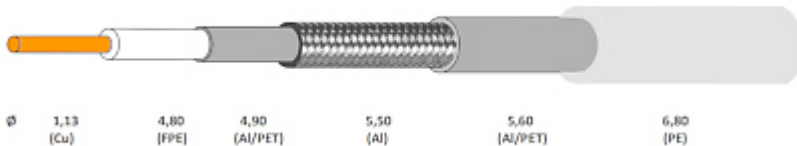

Specification:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

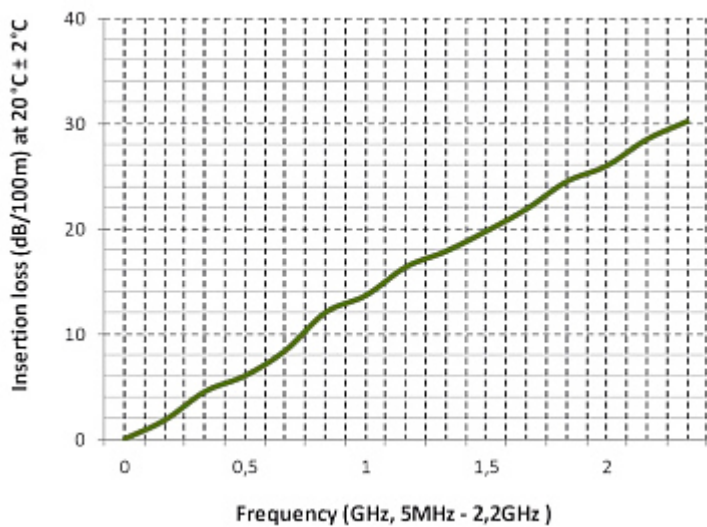

Package:



**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------