

Code: HV/HDMI+HV

## CONVERTER HV/HDMI+HV

Net: 46.34 EUR Gross: 57.00 EUR

The HV/HDMI+HV converter allows to connect the AHD/HD-CVI/HD-TVI/CVBS signals to the standard monitor or projector with a HDMI input. From the video signal the HV/HDMI+HV operates as a loop-through device, equipped with signal input and output.



### SPECIFICATION

Input:	1 x BNC - AHD / HD-CVI / HD-TVI / CVBS @ 5 Mpx (max)
Output:	<ul style="list-style-type: none"><li>• 1 x BNC - AHD / HD-CVI / HD-TVI / CVBS @ 5 Mpx (max)</li><li>• 1 x HDMI @ 1080p</li></ul>
Output signal possible standards:	PAL / NTSC
Supported resolutions:	<ul style="list-style-type: none"><li>• HDMI - 1080p only</li><li>• BNC - 5.0 Mpx (max)</li></ul>
OSD menu:	—
Main features:	In the case of no input signal, the device displays a test chart (color bars) on the connected screen
Power supply:	12 V DC / 500 mA (power adapter included)
Weight:	0.132 kg
Dimensions:	110 x 80 x 28 mm
Guarantee:	2 years

### PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Top view:




Connectors:





Schematic diagram of converter operation:

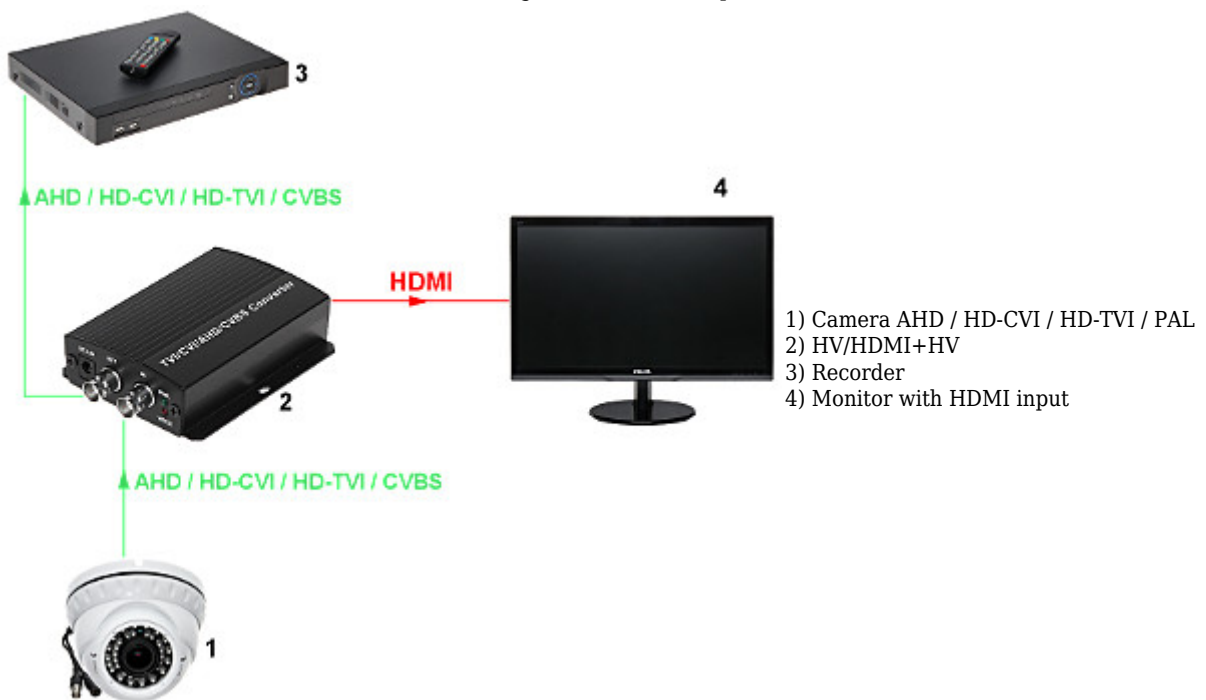

In the kit:



## OUR OPINIONS



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

- The device doesn't display properly an image on the HDMI output in the AHD @ 12.5 fps standard.

