

Code: VGA-1920F

## CONVERTER TO COMPUTER MONITORS **VGA-1920F**

Net: **25.61 EUR** Gross: **31.50 EUR**

The VGA-1920F device converts Composite Video signal or S-Video signal to VGA signal.

It supports the VGA output resolutions up to 1920x1200 with aspect ratios: 4:3, 16:9 and 16:10.



### SPECIFICATION

Input:	<ul style="list-style-type: none"><li>• Video composite (BNC socket),</li><li>• S-VIDEO,</li><li>• VGA (bypass)</li></ul>
Input signal possible standards:	<ul style="list-style-type: none"><li>• PAL, NTSC,</li><li>• VGA (bypass)</li></ul>
Output:	VGA (bypass)
Supported resolutions:	<ul style="list-style-type: none"><li>• 4:3 800 x 600 @ 60/75 Hz 1024 x 768 @ 60 Hz 1280 x 1024 @ 60 Hz 1600 x 1200 @ 60 Hz</li><li>• 16:9 / 16:10 1280 x 720 @ 60 Hz 1366 x 768 @ 60 Hz 1440 x 900 @ 60 Hz 1680 x 1050 @ 60 Hz 1920 x 1080 @ 60 Hz 1920 x 1200 @ 60 Hz</li></ul>
OSD menu:	✓
Possible settings:	<ul style="list-style-type: none"><li>• brightness, contrast, saturation, hue - the settings are saved after power off</li><li>• PIP - Picture In Picture</li></ul>
Power supply:	5 V / 1 A (power adapter included)
Weight:	0.07 kg
Dimensions:	100 x 65 x 26 mm
Guarantee:	2 years

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Control keys:



Device connectors:



Example of device using:

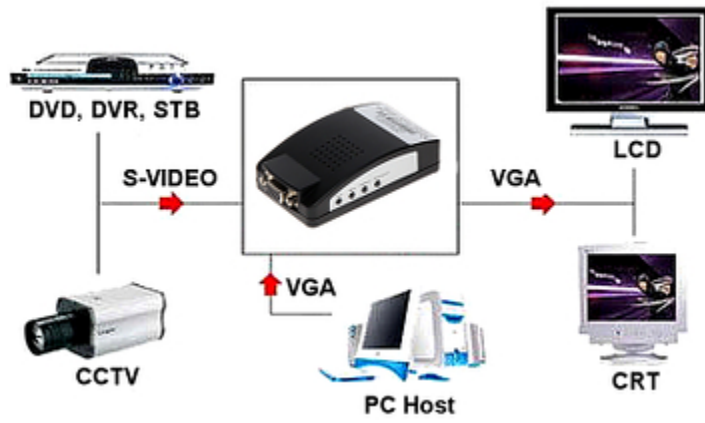

In the kit:

