

Code: HV/HDMI+HV-V2

CONVERTER HV/HDMI+HV-V2

Net: 82.01 EUR Gross: 82.01 EUR

The HV/HDMI+HV-V2 converter allows to connect the AHD/HD-CVI/HD-TVI/CVBS signals to the standard monitor or projector with a HDMI input. From the video signal the HV/HDMI+HV-V2 operates as a loop-through device, equipped with signal input and output.



SPECIFICATION

Input:	1 x BNC - AHD / HD-CVI / HD-TVI / CVBS @ 8 Mpx (max)
Output:	<ul style="list-style-type: none">• 1 x BNC - AHD / HD-CVI / HD-TVI / CVBS @ 8.3 Mpx (max),• 1 x HDMI @ 1080p 60 fps
Output signal possible standards:	PAL / NTSC
Supported resolutions:	<ul style="list-style-type: none">• HDMI - 1080p• BNC - 8.3 Mpx (max)
OSD menu:	—
Main features:	<ul style="list-style-type: none">• In the case of no input signal, the device displays a test chart (color bars) on the connected screen• Automatic recognition of the resolution - LED indication• USB cable 0.9 m (included)• BNC cable 0.9 m (included)
Power supply:	5 V DC / 2 A (power adapter included)
Weight:	0.18 kg
Dimensions:	108 x 95 x 25 mm
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Connectors:



Top view:



Schematic diagram of converter operation:

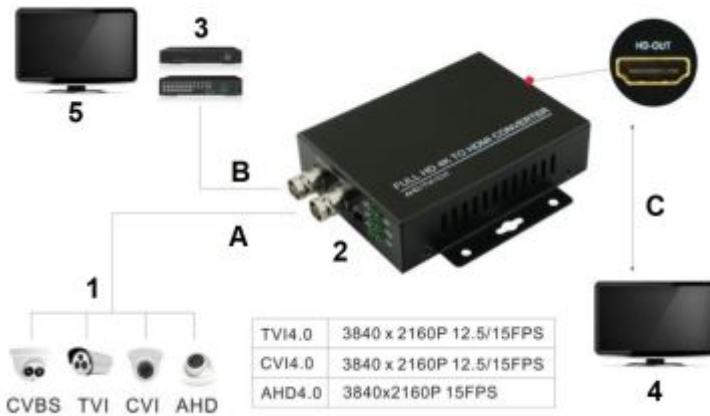

- 1 - Camera AHD / HD-CVI / HD-TVI / PAL
- 2 - HV/HDMI+HV-V2
- 3 - Recorder
- 4 - Monitor with HDMI input
- 5 - Monitor
- A - Video input
- B - Video output
- C - HDMI output

In the kit:



PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

