

Code: DS-KAD606-N

SWITCH **DS-KAD606-N** DESIGNED FOR IP VIDEO DOORPHONES Hikvision

Net: **30.43 EUR** Gross: **30.43 EUR**

The DS-KAD606-N is designed to cooperation with video doorphones and panels working in Hikvision IP standard. The device allows to support and supplies up to 6 internal panels or video doorphones. Devices connected directly to the DS-KAD606-N switch are powered by 24V DC via UTP (cat. 5e) connecting cables.

For large systems the devices can be connected in cascade. Its using allows to create large surveillance system. Furthermore, there is a possibility to connect the system based on DS-KAD606-N with Internet.



SPECIFICATION

Number of ports:	6
Compatibility:	Hikvision IP Video Doorphones
Main features:	Power supply PoE - 24 V DC, compatible with Hikvision IP access control systems
Power supply:	24 V DC / 2.5 A (not included)
Housing:	Plastic, Possibility to mount to the wall
Operation temp:	-10 °C ... 55 °C
Weight:	0.225 kg
Dimensions:	177 x 92 x 32 mm
Manufacturer / Brand:	Hikvision
SAP Code:	305300525
Guarantee:	3 years


PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Front view:

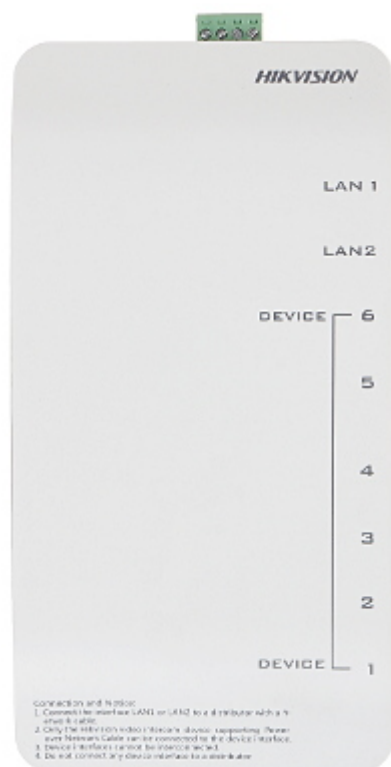

Side view:




Wall mounting side view:




Power connector:



Example of application:

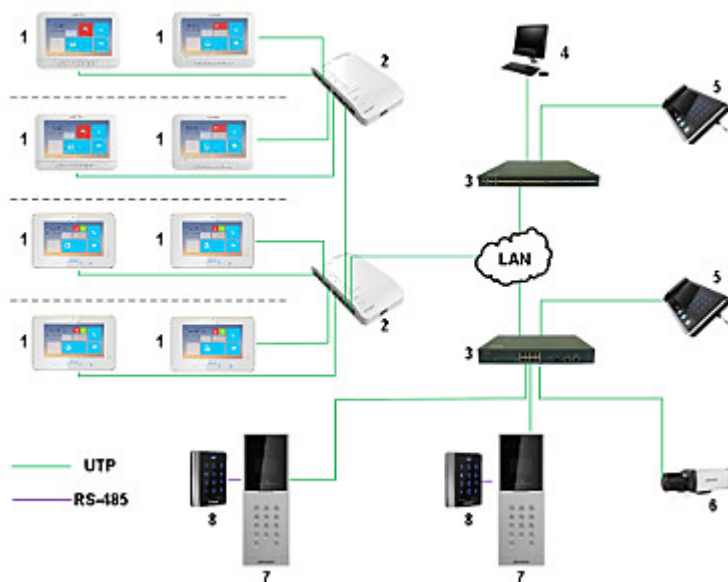

1. INDOOR PANEL
 2. DS-KAD606-N
 3. Switch
 4. Remote client
 5. System management center
 6. IP Camera
 7. Video doorphone
 8. Reader with keypad
- In the kit:

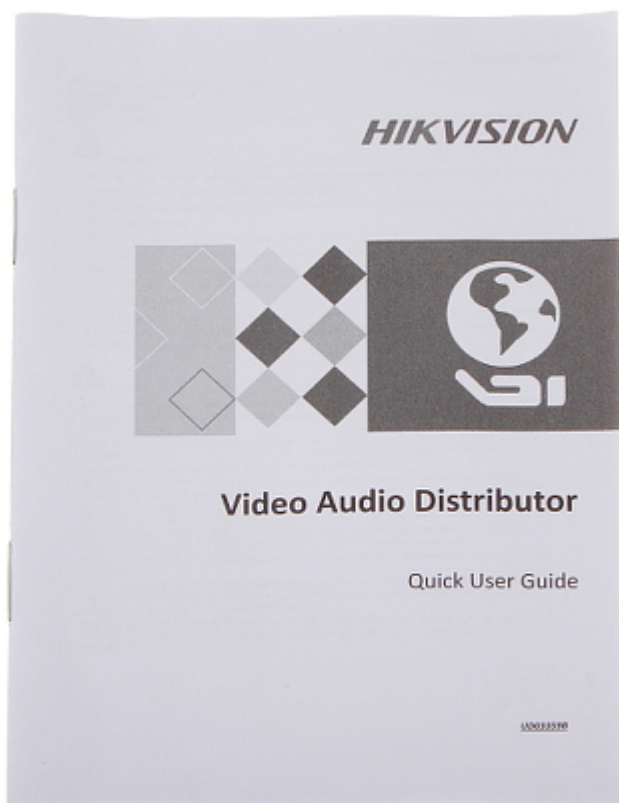

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------