

Code: M-023G

## MULTI-MODE MEDIA CONVERTER **M-023G** ULTIMODE

Net: **24.39 EUR** Gross: **30.00 EUR**

The M-023G converter allows to change electrical signals coming via typical STP/UTP cable into modulated light signal transmitted via multi-mode fiber cable. Media converter has two SC connectors. One is used to transmit (TX) signal, and the second to receive (RX) signal. Optical signal is transmitted and received in the II transmission window of 1310 nm.



### SPECIFICATION

|                         |  |
|-------------------------|--|
| Optical connector type: | 2 pcs SC / PC  |
| Number of fibers:       | 2 pcs  |
| Transmission range:     | 2 km - Multi-mode fiber  |
| Supported standards:    | IEEE 802.3, IEEE 802.3u, 802.3z  |
| Port LAN:               | 1 pcs (RJ-45. UTP/STP)   |
| Transmission speed:     | 10 / 100 / 1000 Mbps   |
| Optical wavelength:     | 1310 nm  |
| Main features:          | <ul style="list-style-type: none"><li>• MDI/MDI-X auto detection feature - auto detecting the data transmission mode</li><li>• Auto detection of the bit rate</li><li>• Bi-directional transmission via two fibers</li><li>• LED indicators showing operating status</li></ul> |
| Power supply:           | 5 V DC / 2 A (power adapter included)  |
| Operation temp:         | 0 °C ... 50 °C   |
| Weight:                 | 0.174 kg   |
| Dimensions:             | 106 x 70 x 27 mm   |
| Manufacturer / Brand:   | ULTIMODE   |
| Guarantee:              | 2 years  |


### PRESENTATION

Front panel:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Rear panel:

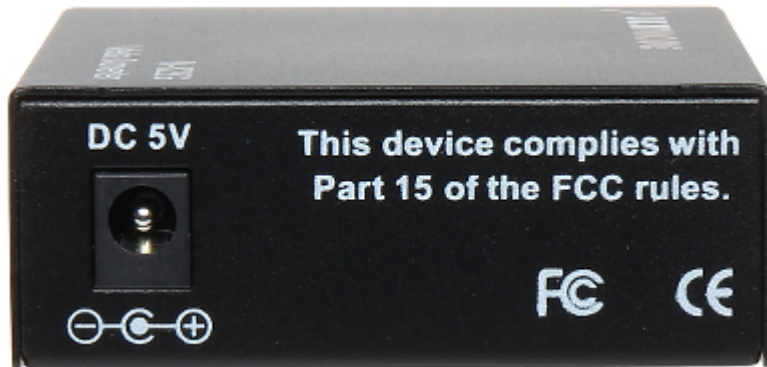

Example of device using:

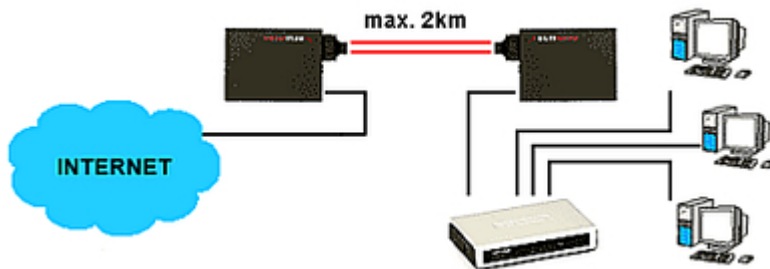

In the kit:

