

Code: OMG2-MM

MULTI-MODE MEDIA CONVERTER **OMG2-MM**

Net: **94.00 PLN** Gross: **115.62 PLN**

The OMG2-MM converter allows to change electrical signals coming via typical STP/UTP cable into modulated light signal transmitted via multi-mode fiber cable. Media converter has two SC connectors. One is used to transmit (TX) signal, and the second to receive (RX) signal. Optical signal is transmitted and received in the II transmission window of 1310 nm.



SPECIFICATION

Optical connector type:	2 pcs SC
Number of fibers:	2 pcs
Transmission range:	2 km - Multi-mode fiber
Supported standards:	IEEE 802.3, IEEE 802.3u, 802.3z
Port LAN:	1 pcs (RJ-45. UTP/STP)
Transmission speed:	10 / 100 / 1000 Mb/s
Optical wavelength:	1310 nm
Main features:	<ul style="list-style-type: none">• MDI/MDI-X auto detection feature - auto detecting the data transmission mode• Auto detection of the bit rate• Bi-directional transmission via two fibers• LED indicators showing operating status
Power supply:	5 V DC / 1 A (power adapter included)
Operation temp:	-10 °C ... 50 °C
Permissible relative humidity:	5 % ... 95 %
Weight:	0.146 kg
Dimensions:	120 x 72 x 27 mm
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Front panel:



Rear panel:



Example of device using:

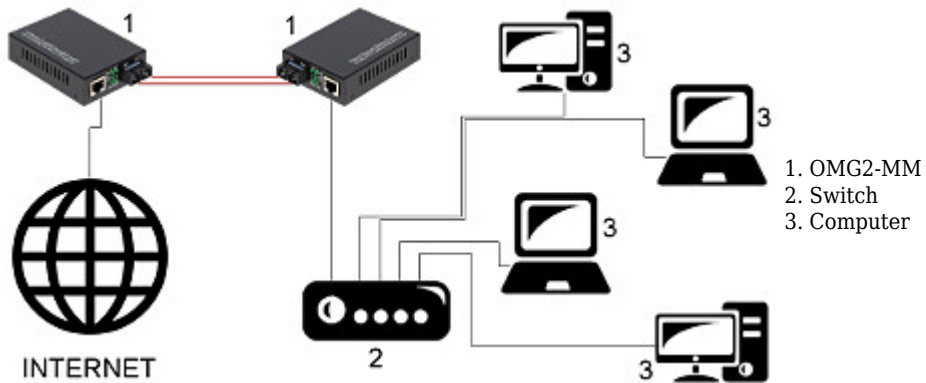

In the kit:





DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60