


Code: PC-2LC/2LC-0.5

SINGLE-MODE PATCHCORD **PC-2LC/2LC-0.5** 0.5 m

Net: **4.02 EUR** Gross: **4.02 EUR**

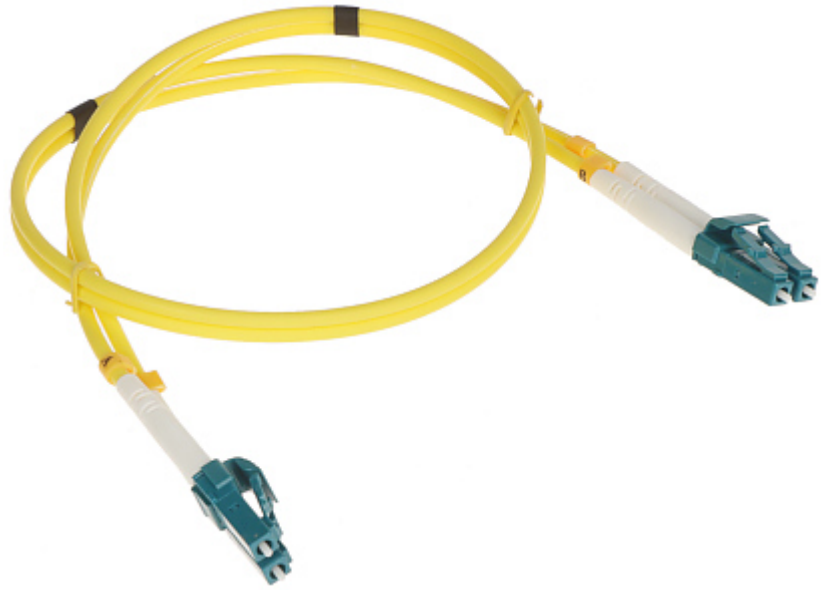


Patchcords are used to optical signal transmission between active devices, patch panel enclosures, etc.

SPECIFICATION

| | |
|--------------------------------|---|
| Connector type: | LC/UPC <-> LC/UPC |
| Fiber optic type: | 9 / 125 μ m |
| Max. connector insertion loss: | 0.14 dB |
| Main features: | <ul style="list-style-type: none">• Made according to the requirements: G.652 D• LSZH (Low Smoke Zero Halogen) coating - means small amount of toxic gases emitted during combustion• Cable diameter : 3 mm |
| Length: | 0.5 m |
| Guarantee: | 2 years |

PRESENTATION

Patchcord connectors:

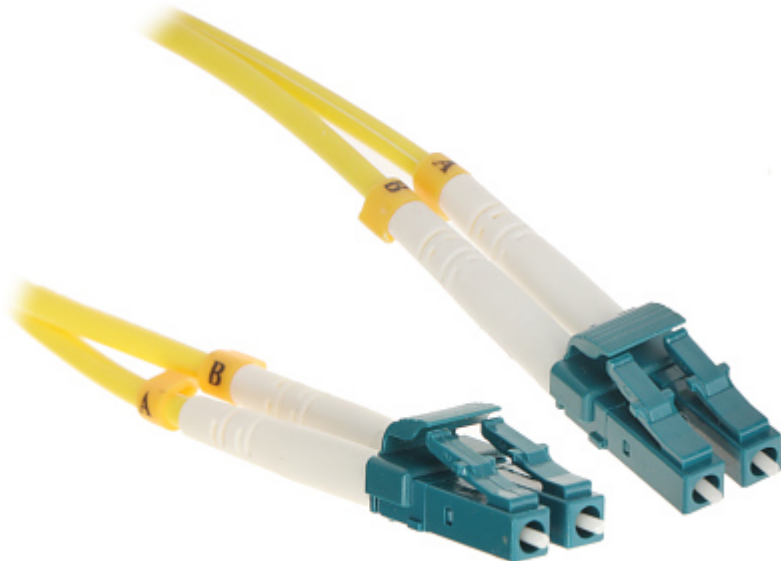

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

