

Code: ULT-8SM-UNI

FIBER OPTIC CABLE **ULT-8SM-UNI**

Net: **0.52 EUR** Gross: **0.52 EUR**



The ULT-8SM-UNI is an universal fiber optic cable for indoor and outdoor applications.

The single-mode fibers used in the cable are ITU-T G.652.D, in 250 µm tight buffers. The fibers are made in accordance with ISO/IEC 11801, PN-EN 50173 and ITU-T G.652.D standards.

SPECIFICATION


Fiber type:	Single-mode, ITU-T G.652.D, U-DQ(ZN)BH
Number of fibers:	8 pcs
Cable diameter:	5.5 mm
Buffer diameter:	250 µm
Maximum pulling force:	2000 N (dynamic)
Minimal bend radius:	116 mm (during installation)
Main features:	<ul style="list-style-type: none">• rodent protected• the LSZH (or LSOH) jacket - zero halogen, flame retardant and low smoke• gel-filled central tube• reinforced by aramid yarn
Application:	<ul style="list-style-type: none">• due to the small size and flexibility, the cables are ideal for installation in cable ducts• it is used in modern FTTH and FTTB systems, in server rooms, between buildings installations• universal fiber optic cables intended for horizontal connections in buildings and outside buildings in secondary sewage system
Operation temp:	-40 °C ... 60 °C
Installation temperature:	-5 °C ... 70 °C
Guarantee:	2 years

PRESENTATION

Cross-section of a cable:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

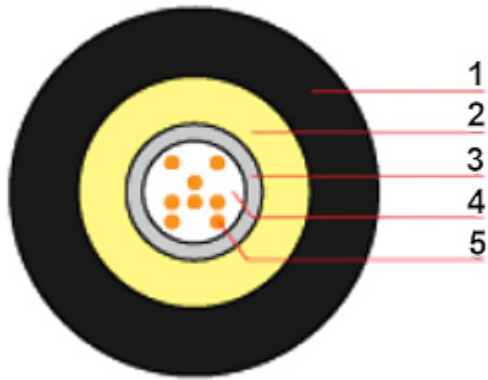

- 1) LSZH jacket (sheath)
- 2) Aramid yarn
- 3) Central tube
- 4) Gel filled tube
- 5) Optical fiber in 250 μm buffer coating

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

