


Code: UT-4DR

COMMUNICATION INTERFACE **UT-4DR** LAN-RS485 ROGER

Net: **101.03 EUR** Gross: **101.03 EUR**

The UT-4DR interface enables communication with devices equipped with communication serial port via computer network. The interface is equipped with a serial port in RS485 standard on one side, and with computer network socket operating in the 10/100 BaseT Ethernet standard on other side. The UT-4DR module is identified in computer network by IP address, which is assigned to the device during configuration.

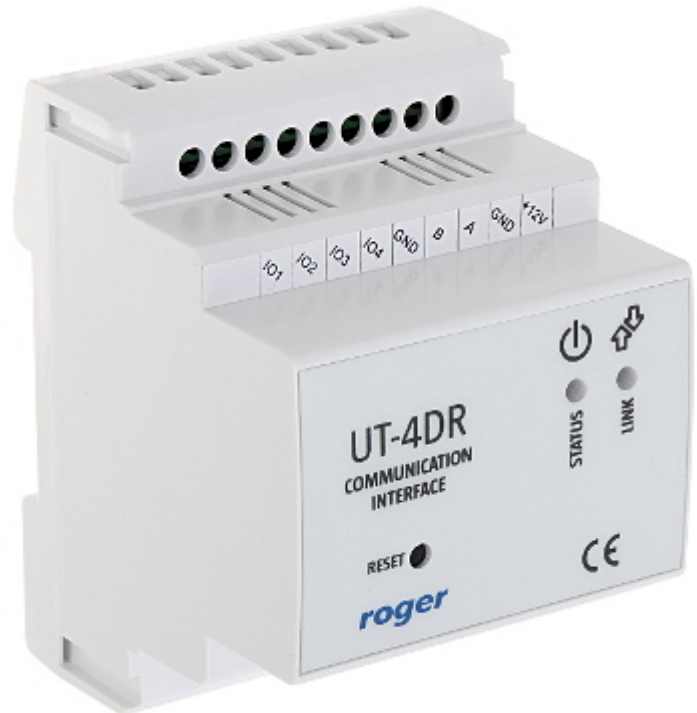


SPECIFICATION

Communication interface:	RS-485
Ethernet interface:	10/100 Base-T
Main features:	<ul style="list-style-type: none">• Fixed, or dynamic IP address• 4 general purpose I/O lines• Control from a Web browser• Controlling I/O lines with Telnet commands
Power supply:	10 V ... 15 V DC
Current consumption:	55 mA
Operation temp:	-10 °C ... 40 °C
Permissible relative humidity:	10 % ... 75 % (non-condensing)
Assembly:	DIN TS-35 rail
Weight:	0.110 kg
Dimensions:	85 x 73 x 62 mm
Manufacturer / Brand:	ROGER
Guarantee:	3 years

PRESENTATION

Front panel view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

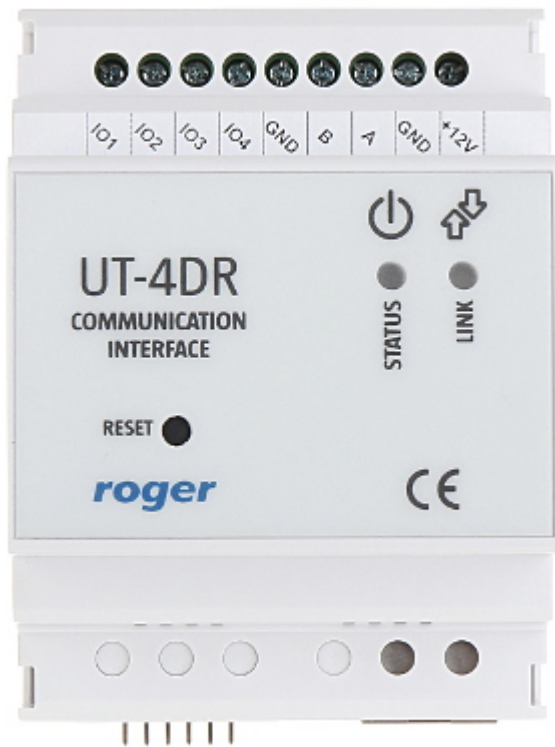

Rear view:



Connectors view:



In the kit:



PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

