

Code: DS-K2M060

SECURE DOOR CONTROL UNIT **DS-K2M060** Hikvision

Net: **79.95 EUR** Gross: **79.95 EUR**

The DS-K2M060 secure door control unit is an intermediary device in the transfer of information between the proximity reader, the exit button, the access controller and the electromagnetic lock. The device allows to maintain the last state of the lock in the case of communication loss with the controller or failure of any of the system components. The control unit is designed to work with the RFID readers transmitting data in the Wiegand standard, while communication with the access controller is done via the RS-485 interface. In addition, the device can work with the door opening sensor and the exit button.



SPECIFICATION

Power supply:	12 V DC
Main features:	<ul style="list-style-type: none">• RS-485 interface• Wiegand interface• Relay output NO/NC• ID address configuration• Tamper detection - removing from mounting surface• LED indicators showing operating status
Operation temp:	-30 ... 55 °C
Weight:	0.14 kg
Dimensions:	115 x 48 x 26 mm
Manufacturer / Brand:	Hikvision
SAP Code:	302901931
Guarantee:	3 years

PRESENTATION

Front view:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Rear view:




Connectors description:

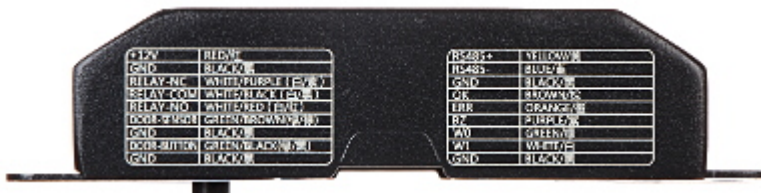

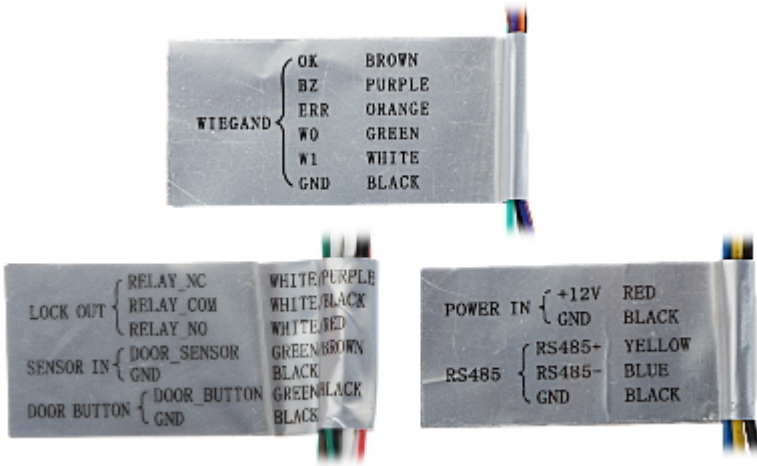

In the kit:

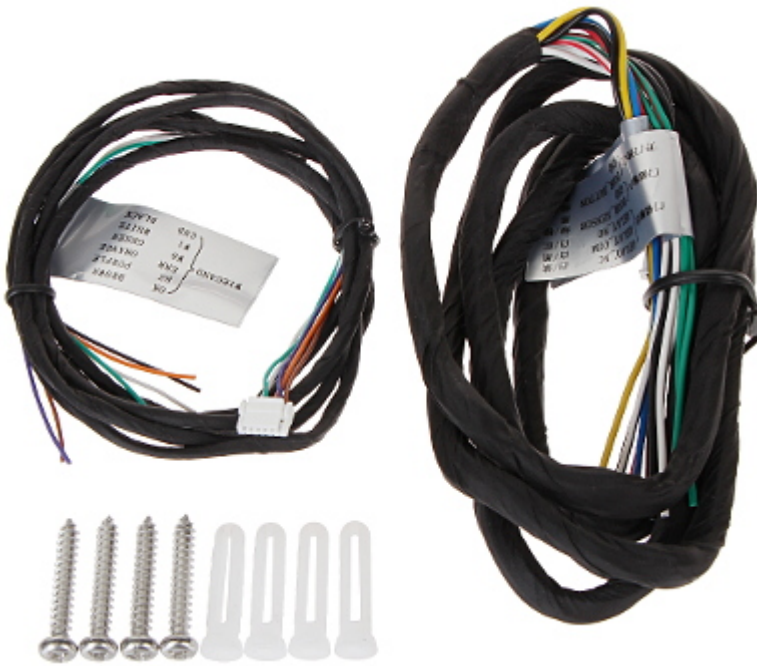

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------