

Code: ATLO-KRMD-512

## CODE LOCK ATLO-KRMD-512

Net: 42.03 EUR Gross: 51.70 EUR



Outdoor, autonomous code lock with RFID reader.

Autonomous operation of the device allows the user to:

- Open by using a card or PIN code.
- Remember stored cards or PIN codes.
- Signaling left the door open.
- Acoustic and optical signaling.

Administrator capabilities are following:

- Programming by using the keypad.
- Adding a new card by using the keypad.
- Adding a new card and entering a PIN code.
- Changing the PIN code of the user.
- Deleting the PIN code of the user.
- Setting the lock release time.
- Restoring the default settings.

### SPECIFICATION

Cards support:	Unique EM 125kHz
Reading distance of prox-keys:	max. 3 cm
Autonomous operation:	✓
Keyboard built-in:	✓
Doorbell button:	✓
Tamper output:	—
Communication:	Wiegand 26, Wiegand 34
Power supply:	<ul style="list-style-type: none"><li>• 12 V DC <math>\pm</math> 10 %</li><li>• 12 V AC <math>\pm</math> 10 %</li></ul>
Maximal current consumption:	<ul style="list-style-type: none"><li>• 30 mA (Standby mode)</li><li>• 60 mA (operation)</li></ul>
Relay contacts load:	3 A / 12 V

Main features:	<ul style="list-style-type: none"> <li>• 2000 indexed users</li> <li>• Identification: Card and/or PIN</li> <li>• Blue backlight of the keys</li> <li>• Support for door contact and exit button</li> <li>• NO/NC output,</li> <li>• Wiegand interface 26 / 34 bit,</li> <li>• Ability to use codes without associated cards</li> <li>• Number of relay outputs : 1,</li> <li>• Electric strikes and electromagnetic locks support</li> <li>• Reversing bolt support</li> <li>• Possible connection of the external ATLO-R series reader (read in/out access control)</li> <li>• Blue backlight</li> </ul>
Operation temp:	-40 °C ... 60 °C
Permissible relative humidity:	10 ... 90 % (non-condensing)
Housing:	Metal
Color:	Silver + Black
"Index of Protection":	IP68
Vandal-proof:	✓
Weight:	0.49 kg
Dimensions:	78 x 115 x 25 mm
Manufacturer / Brand:	ATLO
Guarantee:	<b>3 years</b>

## PRESENTATION


Front panel:



Mounting side view:



Internal view of the housing:

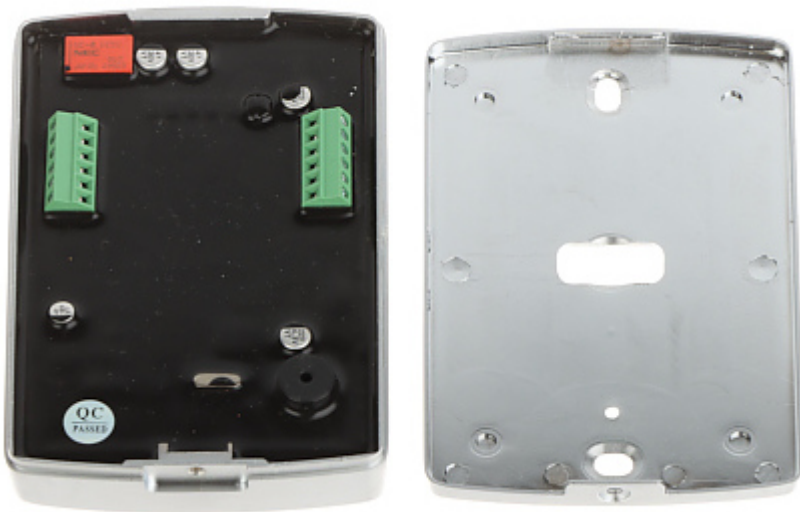



In the kit:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------