

Code: AI-8

## OPTICAL FIBER FUSION SPLICER AI-8

Net: 1 355.64 EUR Gross: 1 667.44 EUR



The AI-8 optical fiber fusion splicer uses the high-speed image process technology and special exact orientation technology, so that the whole process of fiber's fusion can be finished in 10 seconds automatically.

**Attention!** By default, the device is configured in auto mode. In most cases, any adjustments of the default settings are not required. No calibration is required - it must be done only in case of problems with obtaining the correct splice. Available in the [Google Play](#) and [AppStore](#) application is required, for example, to change the default splicing program or calibration due to extremely changing environmental conditions.

Changing the parameters and configuration of the splicer is possible only through the Bluetooth interface with dedicated applications on Android / iPhone.

### SPECIFICATION

Fiber optic type:	<ul style="list-style-type: none"><li>• Multi-Mode (MM) - G.651,</li><li>• Single-Mode (SM) - G.652 &amp; G.657,</li><li>• Single-Mode (DS / NZDS) Non-Zero Dispersion Shifted Fiber (G.655)</li></ul>
Cladding diameter:	80 ... 150 $\mu\text{m}$
Outer coating diameter:	0.1 ... 1 mm
Fiber cleaved length:	16 mm
Orientation technology:	core alignment, cladding alignment
Display:	5.1 " LCD, 800 x 480 px Image: display X and Y axis simultaneously
Average fusion loss:	0.01 dB (MM) 0.025 dB (SM) 0.04 dB DS / NZDS
Average fusion time:	6 s
Average heat time:	15 s
Fusion programs:	(factory applications) + (user applications)
Internal light:	✓
Internal heater:	✓
Set fusions parameters:	<ul style="list-style-type: none"><li>• Surface angle test</li><li>• fiber forward</li><li>• prefuse power</li><li>• prefuse time</li><li>• arc power</li><li>• arc time, etc</li></ul>

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Fusion storage:	✓
Mechanical strength test:	2 N
Computer interface:	USB 2.0 - Possibility to charge smartphones
Power supply:	13.5 V DC / 4 A (power adapter included)
Battery power supply:	11 V DC Li-Ion battery, 7800 mAh
Electrodes lifetime:	~ 3000 fusions
Operation temp:	-15 °C ... 50 °C
Permissible relative humidity:	< 95 % (non-condensing)
Weight:	2.07 kg
Dimensions:	197 x 143 x 125 mm
Guarantee:	2 years

## PRESENTATION

Top view:



Operation elements of the splicer:

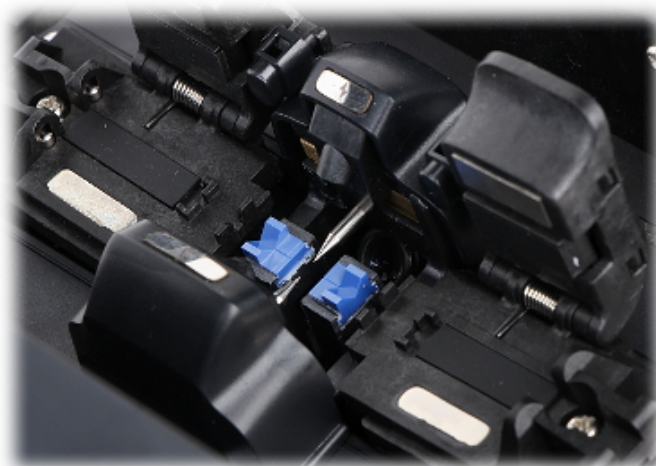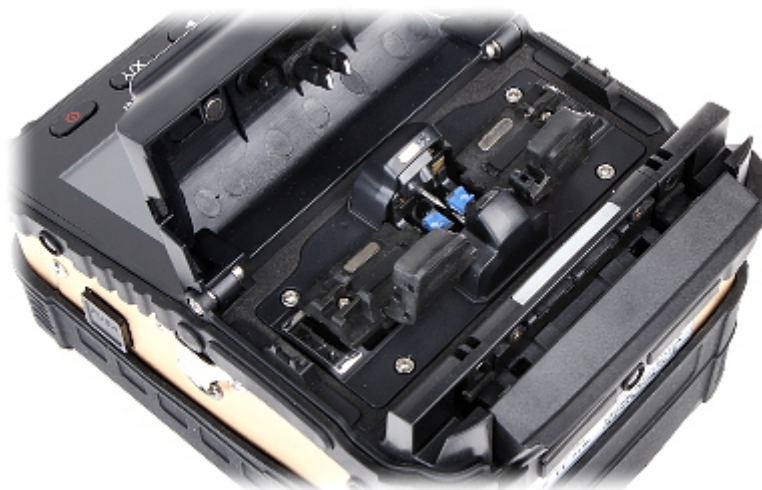

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

The device has the ability to remove the battery, which is recommended when the device is not used for a long time:



Side view:



Fiber cleaver tool:



In the kit:



The kit includes a practical box housing a fusion splicer, the necessary tools and a small table and stool:





## OUR OPINIONS



- Very good quality fiber cleaver tool included in the kit.