

Code: IEC-G/SKR-113

IEC SOCKET IEC-G/SKR-113

Net: 0.81 EUR Gross: 1.00 EUR

The patented design, based on "Self-Install" concept, ensures professional, durable connection. Whole procedure takes no more than several seconds. The connector installed properly is fully integrated with the cable, however the plug is reusable - the cap can be unscrewed and the plug pulled off.



SPECIFICATION

Connector type:	IEC Socket
Attachment of connector elements:	Twisting on
Shield fastening:	Twisting-on
Wire mounting:	Pressing
Application:	Coaxial cable
Dielectric diameter:	min. 4.9 mm max. 5.1 mm
Cable diameter:	max. 7.5 mm
Impedance:	75 Ω
Material:	Metal / PET
Watertightness:	<input checked="" type="checkbox"/>
Example of application:	<ul style="list-style-type: none">• RG6• HFEK• Triset113
Main features:	<ul style="list-style-type: none">• Very easy and quick assembly• Corrosion resistance
Weight:	0.012 kg
Dimensions:	\varnothing 14 x 38 mm
Guarantee:	2 years

PRESENTATION


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



View after take connector to pieces:



Method of mounting:

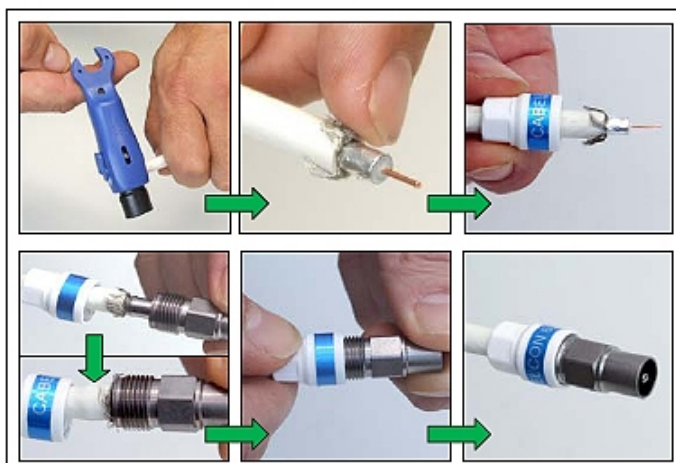



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60