

Code: CV08-2812/3

PAL VANDALPROOF CAMERA **CV08-2812/3** 800 TVL, 960H 2.8 ... 12 mm

Net: **40.52 EUR** Gross: **40.52 EUR**

The CV08-2812/3 camera is equipped with very high resolution HDIS sensor.

It is equipped with IR illuminator, which is turned on by twilight sensor when illumination conditions are low. Housing construction allows to mount the camera to the ceiling and the wall (image is right oriented in both cases).

Camera module is mounted inside the dome housing, which allows to rotate the camera on any axis.



SPECIFICATION

Standard:	PAL
Sensor:	1/3 " HDIS 139+8510
Resolution:	800 TVL, 960H
Lens:	2.8 ... 12 mm (adjusted by screwdriver, you don't have to open the camera's housing)
View angle:	81 ° ... 23 ° (manufacturer data) 84 ° ... 28 ° (our tests result)
Range of IR illumination:	30 m
S/N ratio:	> 48 dB
Video output:	1 Vpp / 75 Ω
Power supply:	12 V / 420 mA
Main features:	• ICR - Movable InfraRed filter • BLC - Back Light Compensation • AGC - Automatic Gain Control • Auto White Balance • Day/night mode
OSD menu:	—
Vandal-proof:	✓
Permissible relative humidity:	max. 95 %
"Index of Protection":	IP66
Housing:	Dome - Metal
Color:	Dark graphite

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Operation temp:	-10 °C ... 50 °C
Weight:	0.615 kg
Dimensions:	Ø 120 x 95 mm
Guarantee:	2 years

PRESENTATION

Camera is out from clamping ring:



Mounting side view:

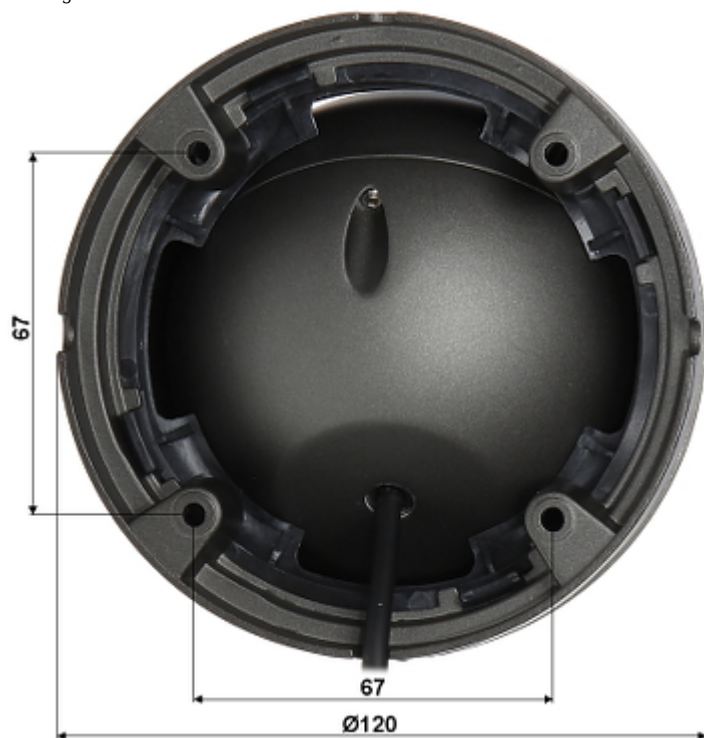


Dimensions:



OUR TESTS



Camera image at artificial illumination (about 30Lux):

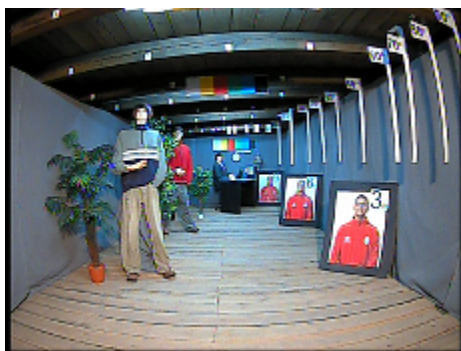

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

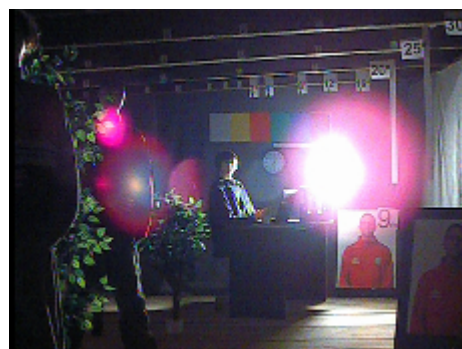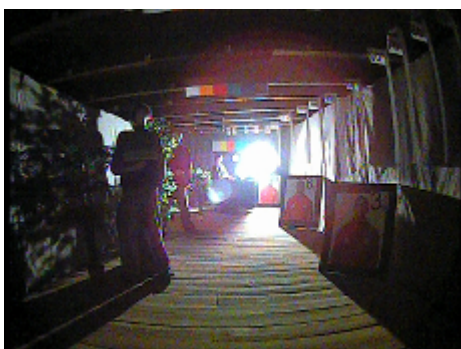

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------