

Code: BCS-TIP5300IR-E

IP CAMERA **BCS-TIP5300IR-E** 3.3 ... 12 mm

Net: **253.41 EUR** Gross: **253.41 EUR**

IP camera equipped with very good high resolution sensor. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/3 " Progressive Scan CMOS
Digital Image Processor:	AMBARELLA A5S
Matrix size:	3.0 Mpx
Resolution:	2048 x 1536 - 3.0 Mpx 1920 x 1080 - 1080p 1280 x 720 - 720p 704 x 576 - D1 352 x 288 - CIF
Scanning system:	Progressive
Lens:	3.3 ... 12 mm, F1.4
View angle:	79 ° ... 25 °
Range of IR illumination:	20 m
S/N ratio:	> 50 dB (AGC off)
Image compression method:	H.264 / MJPEG
Bitrate:	32 ... 8192 kbps - H.264 32 ... 12288 kbps - MJPEG
Main stream frame rate:	20 fps @ 2048 x 1536 25 fps @ 1920 x 1080
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	10
ONVIF:	2.0
Alarm inputs / outputs:	—
Audio:	—

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

RS-485 interface:	—
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS • Windows Phone: Free application wDMSS Lite There are also paid versions of mobile applications: gDMSS Plus, iDMSS Plus, wDMSS plus
Power supply:	• PoE (802.3af), • 12 V DC / 0.51 A
Power consumption:	6 W
Main features:	• DNR - Digital Noise Reduction • ICR - Movable InfraRed filter • AGC - Automatic Gain Control • BLC - configurable Back Light Compensation • WB - White Balance (ATW/AWB/manual/indoor/outdoor) • Day/Night mode (color/b&w/auto) • Motion Detection • Configurable Privacy Zones • Mirror - Mirror image
Housing:	Compact, Metal
Color:	White
"Index of Protection":	IP66
Operation temp:	-30 °C ... 60 °C
Weight:	1.28 kg
Dimensions:	Ø 104 x 307 mm
Manufacturer / Brand:	BCS
Guarantee:	2 years

PRESENTATION



Side view:




Camera view after remove the Dome cover - camera lens adjustment knobs are visible:



Mounting side view:



Camera dimensions:

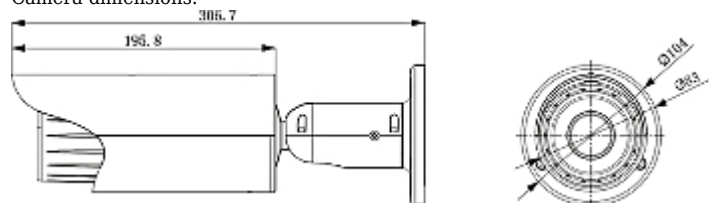


In the kit:



OUR TESTS


Camera image at artificial illumination (about 30Lux):

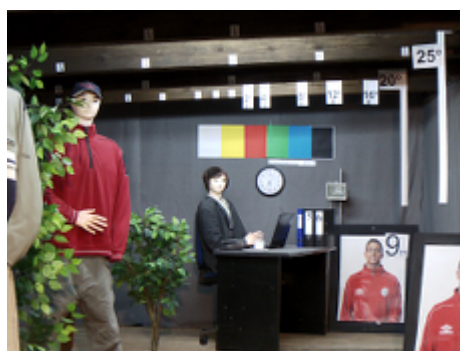

Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

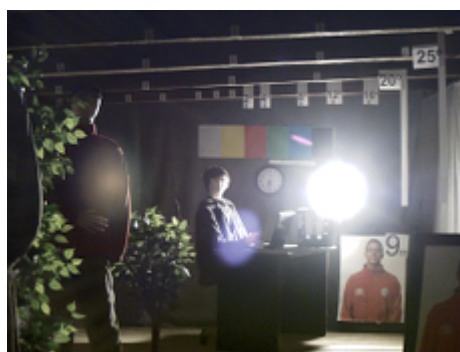

PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

