

Code: DH-IPC-HF8630FP

IP CAMERA **DH-IPC-HF8630FP** - 6.3 Mpx DAHUA

Net: **634.29 EUR** Gross: **634.29 EUR**

IP camera with efficient H.265 / H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 3072 x 2048 - 6 Mpx. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

IVS analysis - crossing the line (tripwire), intrusion, scene changing, abandoned/missing object, face detection, people counting. PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/1.8 " STARVIS™ CMOS
Matrix size:	6.3 Mpx
Resolution:	3072 x 2048 - 6.3 Mpx , 2560 x 1920 - 5.0 Mpx , 2048 x 1536 - 3.1 Mpx , 2304 x 1296 - 3.0 Mpx , 1920 x 1080 - 1080p , 1280 x 960 - 1.3 Mpx , 1280 x 720 - 720p
Video output:	1 Vpp / 75 Ω
Lens:	—
Auto Iris socket:	DC
Min. illumination:	• 0.05 Lux (color) / F1.2 • 0.005 Lux (B/W) / F1.2
S/N ratio:	> 50 dB
Image compression method:	H.265 / H.264 / MJPEG
Alarm inputs / outputs:	2 / 1
RS-485 interface:	✓
Protocols:	Pelco-D, Pelco-P and others
Bitrate:	• 24 ... 16384 kbps - H.264 • 14 ... 9984 kbps - H.265
Main stream frame rate:	25 fps @ 6.3 Mpx


Network interface:	100/1000 Base-T (RJ-45)
Network protocols:	HTTP, HTTPS, TCP, ARP, RTSP, RTP, UDP, SMTP, FTP, DHCP, DNS, DDNS, PPPoE, IPv4/IPv6, QoS, UPnP, NTP, Bonjour, 802.1x Radius, Multicast, ICMP, IGMP, SNMP
Audio:	• Microphone built-in • External microphone input • Audio output • Bi-directional audio streaming support • Audio detection
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	20
ONVIF:	2.41
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS, Android: Free application IMOU • iOS (iPhone): Free application DMSS, iOS (iPhone): Free application IMOU
Main features:	• D-WDR - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • F-DNR (Defog) - Reduction of image noise caused by precipitation • EIS - Electronic Image Stabilization • ICR - Movable InfraRed filter • D-ZOOM - Digital Zoom • WB - White Balance (ATW/AWB/manual/indoor/outdoor) • BLC - configurable Back Light Compensation • HLC - High Light Compensation (spot) • Day/Night mode (color/b&w/auto) • Audio detection • Configurable Privacy Zones • Sharpness - sharper image outlines • Mirror - Mirror image • Motion Detection • IVS analysis : crossing the line (tripwire), intrusion, abandoned/missing object, face detection, people counting • Heat map - the selection in the image by corresponding colors the areas with different traffic
Power supply:	• PoE (802.3af) • 12 V DC • 24 V AC
Power consumption:	< 7 W
Housing:	BOX, Metal
Color:	White
Operation temp:	-30 °C ... 60 °C
Weight:	0.76 kg
Dimensions:	161 x 86 x 74 mm
Manufacturer / Brand:	DAHUA
Supported languages:	English, Polish
Guarantee:	3 years

PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

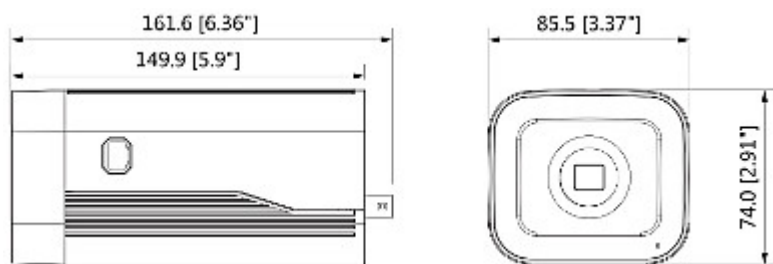

Side view:



Bottom view:



Rear view:



In the kit:



See the ability of operation in imou cloud:

:

OUR TESTS

Camera image at artificial illumination (about 30Lux):




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at direct strong light opposite to camera:



Camera image at night conditions with external IR illuminator on:

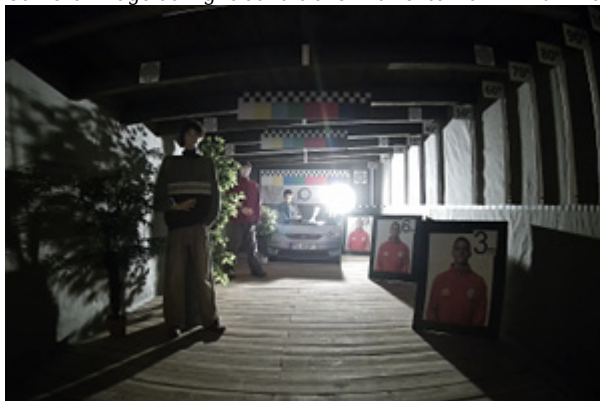

Camera image at night conditions, at different illumination values show below:

10 LUX:



1 LUX:



0.1 LUX:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------