

Code: HC-SG560

HUNTING CAMERA HC-SG560

Net: 134.61 EUR Gross: 165.57 EUR

Very good digital hunting camera, perfect to monitoring animals eg. in the forest, and also to surveillance houses, summer cottages, stores, etc. Built-in InfraRed illuminator enables recording video data also at night. Even with IR illuminator on, the device is completely invisible to the human eye, due to use the IR LEDs with 940 nm wavelength. Due to above the illuminator is completely invisible to the human eye. Camera is triggering by PIR detector and based on its settings can take one image or a few images or records a video sequence.

Minimal power consumption ensures very long and continuous operation time on batteries, even up to 6 months.

Hunting camera is full hermetic and resistant to very different environment conditions.

Warning! The hunting camera supports only SDHC cards and FAT32 file system.



SPECIFICATION

Sensor:	5 Mpx CMOS
View angle:	60 °
IR illuminator wavelength:	940 nm (invisible to the human eye)
Range of IR illumination:	10 m
Number of taking photos at once:	max. 3 still images
Built-in monitor:	—
Internal memory:	—
External memory:	max. 32 GB SD memory card (not included)
Still image resolution:	12 Mpx (4032x3024) 8 Mpx (3264x2448) 5 Mpx (2560 x 1920)
Video sequence resolution:	1280 x 720 (HD Ready) @ 25 fps 640 x 480 @ 20 fps
Video sequence duration time:	5 ... 60 s
Day/night mode:	ICR automatic filter
PIR detection range:	22 m
Detection angle:	50 °
PIR detector:	with adjustable sensitivity (3 levels)
Battery power supply:	4 / 8 AA (Batteries), DC 6V/12W power adapter (not included)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Stand-by power consumption:	400 μ A Battery supply is sufficient for approx. 8 months of operation in Standby mode
Operating power consumption:	< 150 mA (350mA with IR illuminator on) In still images capture mode, battery supply is sufficient for approx. 6000 images
Operation temp:	-20 $^{\circ}$ C ... 60 $^{\circ}$ C
Permissible relative humidity:	5 ... 90 % (non-condensing)
Main features:	<ul style="list-style-type: none"> • Low battery level alarm • Remote controller with monitor built-in - included
Weight:	0.23 kg
Dimensions:	140 x 103 x 67 mm
Supported languages:	English
Guarantee:	2 years

PRESENTATION

Device connectors:



Internal view (after open the enclosure):

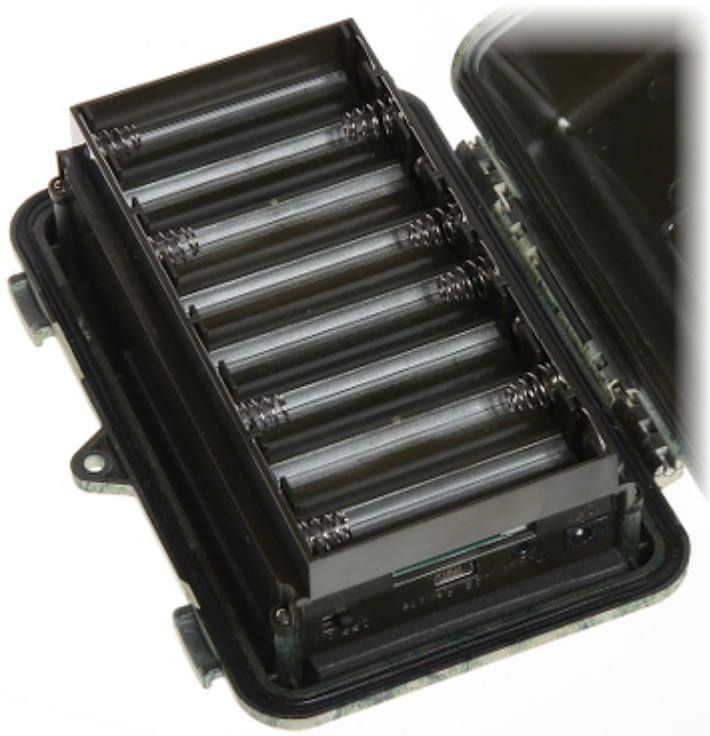

Bottom view:



Mounting side view:



In the kit:



OUR TESTS



OUR OPINIONS



- Very long operation time with battery supply.



- The device allows to take a photo with 12Mpx resolution, but our tests result proofs, that this resolution is interpolated and the real sensor resolution is 5Mpx.