

Code: HC-MG983G

HUNTING CAMERA HC-MG983G

Net: 324.82 EUR Gross: 324.82 EUR

Very good digital hunting camera, perfect to monitoring animals eg. in the forest, and also to surveillance houses, summer cottages, stores, etc. Built-in InfraRed illuminator enables recording video data also at night. Even with IR illuminator on, the device is completely invisible to the human eye, due to use the IR LEDs with 940 nm wavelength. Due to above the illuminator is completely invisible to the human eye. Camera is triggering by PIR detector and based on its settings can take one image or a few images or records a video sequence.

Minimal power consumption ensures very long and continuous operation time on batteries, even up to 6 months.

Attention! The GSM phone coverage in a particular place does not automatically mean the GSM coverage for hunting camera. The coverage should be double-checked especially when the device is installed in a forest. Hunting camera is full hermetic and resistant to very different environment conditions.

Warning! The hunting camera supports only SDHC cards and FAT32 file system.



SPECIFICATION

Sensor:	14 Mpx CMOS
View angle:	60 °
IR illuminator wavelength:	940 nm (invisible to the human eye)
Range of IR illumination:	20 m
Number of taking photos at once:	max. 3 still images
Built-in monitor:	3 " - Parameters and options display, still images playback
Internal memory:	—
External memory:	max. 32 GB SD memory card (not included)
Still image resolution:	30 Mpx - 6400 x 4800 20 Mpx - 5184 x 3888 14 Mpx - 4320 x 3240
Video sequence resolution:	1920 x 1080 1280 x 720 640 x 480
Video sequence duration time:	10 s ... 5 minutes
Day/night mode:	ICR automatic filter
PIR detection range:	30 m
Detection angle:	60 °
PIR detector:	with adjustable sensitivity (3 levels)
GSM/GPRS communication:	sending the MMS messages to the previously set mobile phone numbers

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Battery power supply:	8 pcs AA (Batteries), DC 6V/12W power adapter (not included)
Stand-by power consumption:	250 μ A Battery supply is sufficient for approx. 6 months of operation in Standby mode
Operating power consumption:	< 150 mA (350mA with IR illuminator on)
Operation temp:	-20 °C ... 60 °C
Permissible relative humidity:	5 ... 90 % (non-condensing)
Audio:	Microphone built-in, 8 kHz / 16 bit
Main features:	• 2 x Remote control • Low battery level alarm
Weight:	0.295 kg
Dimensions:	147 x 290 x 82 mm
Supported languages:	English
Guarantee:	2 years

PRESENTATION

Front view:




Internal view of the housing:



Bottom view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

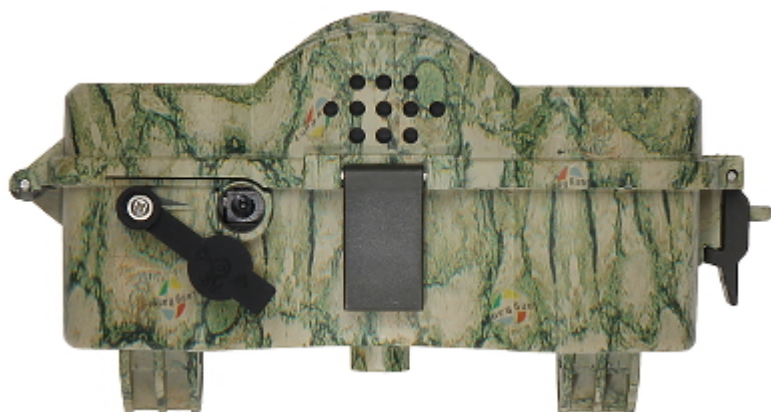

Device connectors are visible after remove the bottom cover:



Mounting side view:




In the kit:



OUR TESTS

Consecutive frames of image from hunting camera:

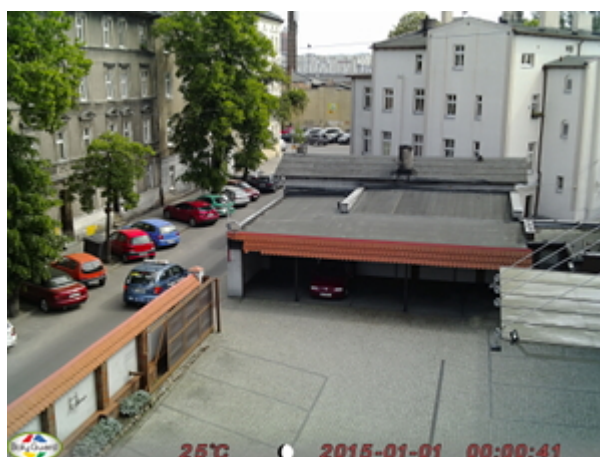

OUR OPINIONS



- Very long operation time with battery supply.



- The device allows to take a photo with 30 Mpx resolution, but our tests result proofs, that this resolution is interpolated and the real sensor resolution is 14 Mpx.
- .

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

