

Code: F/ZAC-RG-6/CSR

COMPRESSION PLUG F/ZAC-RG-6/CSR

Net: 0.52 EUR Gross: 0.52 EUR

Precise thread eliminates problems with screwing the connectors on sockets. Double compression rings on the cable and the O-ring seal at connection side fully protect the cable and the installation equipment against water penetration.

Quick and easy assembly, as well as stability of operation of the equipment are really worth the price.




SPECIFICATION

Connector type:	"F" Straight plug
Attachment of connector elements:	Compression mounting
Application:	Coaxial cable
Impedance:	75 Ω
Wire mounting:	—
Cable diameter:	max. 8.0 mm
Shield fastening:	Compression mounting
Material:	Brass (Nickel-plated)
Watertightness:	✓
Example of application:	RG6, NS100-TRISHIELD, TCC-113-TRISHIELD, TRISSET-113
Main features:	<ul style="list-style-type: none">• Elastic sealing• Watertightness of connector with cable connection• Wide frequency range• Very low loss in the whole operating band• Perfect matching to the transmission line within the whole operating band• Many patent-pending solutions• Properly compressed connection is highly resistant to break
Weight:	0.009 kg
Dimensions:	Ø 13 mm x 28 mm
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

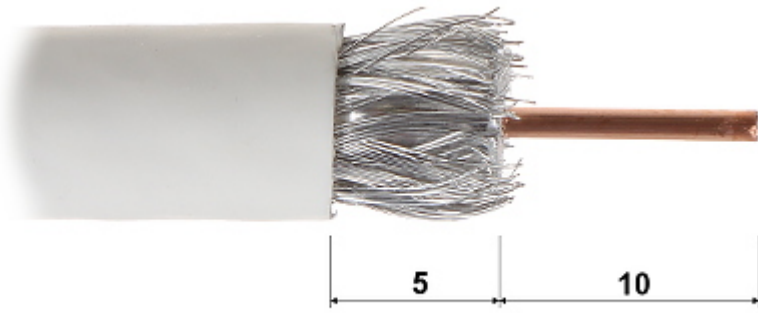

Plug terminated on the cable:



OUR OPINIONS



- Properly compressed connection is highly resistant to break.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60