

Code: CAM-ANALOG-2.0

WIRELESS TRANSMISSION KIT 5.8 GHz **CAM-ANALOG-2.0** TXRX SET

Net: 261.64 EUR Gross: 261.64 EUR

The set is designed to wireless video and audio transmission (2 lines) in professional CCTV systems.

The set contains: one transmitter and receiver operating within free ISM 5725 ... 5875 MHz band.



SPECIFICATION

Video format:	AHD / HD-CVI / HD-TVI / CVBS : max. 1080p
Frequency range:	5.725 ... 5.875 GHz
Number of channels:	2
Transmitter power:	25 mW, 14 dBm
Receiver sensitivity:	-85 dBm
Antenna beam angle:	45 °
Radio communication range (at open area):	max. 500 m
Modulation:	FM
Audio frequency response:	—
Connectors:	BNC socket : 1 Vpp / 75 Ω
Main features:	• Real time transmission, with no delays nor loss of image quality • interference free transmission (industrial, 802.11, Bluetooth, radiotelephony, etc.) • High gain directional antennas providing stable operation
Proper operation conditions:	• the kit (transmitter and receiver) supporting the same camera, has to be set to the same channel (switch set to the same number) • at the same location, each of used kits has to be set to different channel • the transmitter and receiver antennas should be visible to each other (no obstacles like building, walls, trees, etc. between them)
Maximal mast diameter:	Ø 50 mm
Power supply:	9 V ... 16 V DC
Current consumption:	• ≤ 800 mA - Tx • ≤ 500 mA - Rx
Operation temp:	-20 °C ... 55 °C
"Index of Protection":	IP66

Weight:	• 0.38 kg - Tx • 0.48 kg - Rx
Dimensions:	• 152 x 105 x 60 mm - Tx • 164 x 164 x 80 mm - Rx
Manufacturer / Brand:	CAMSAT
Guarantee:	2 years

PRESENTATION

Transmitter and receiver (after remove the cover):



Transmitter and receiver mounted on the mast:




Transmitter and receiver connectors:





In the kit:

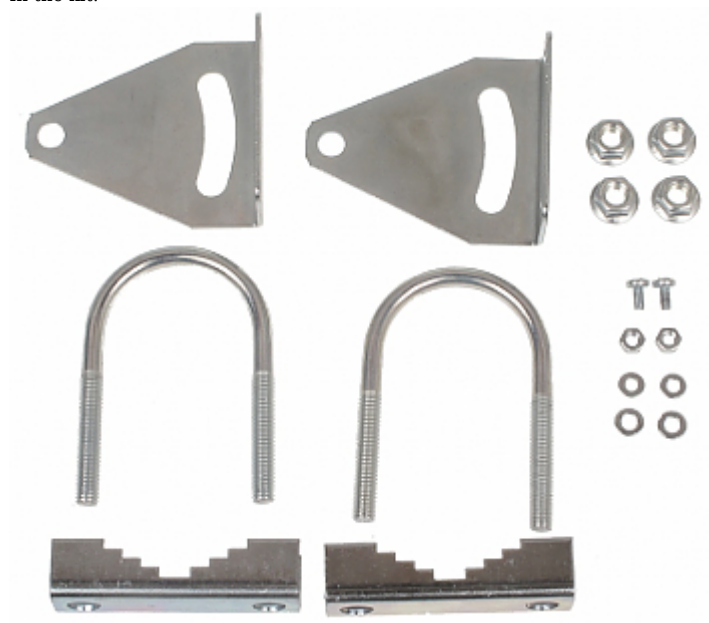

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------