

Code: FTP/K5/305M


## TWISTED-PAIR CABLE **FTP/K5/305M**

Net: **0.38 EUR** Gross: **0.38 EUR**

The FTP/K5/305M twisted-pair cable is designed to professional applications of installation.

For convenience, cable is marking with length counter printed with 1 m distance step.

The cable complies with the CPR No. 305/2011 directive and meets the requirements of the PN-EN 50575 European standard which specifies requirements in fire conditions, test methods and rating of cables used as building material. The cable has a Declaration of Performance and a CE marking, which confirm its compliance with the guidelines of the CPR regulation.

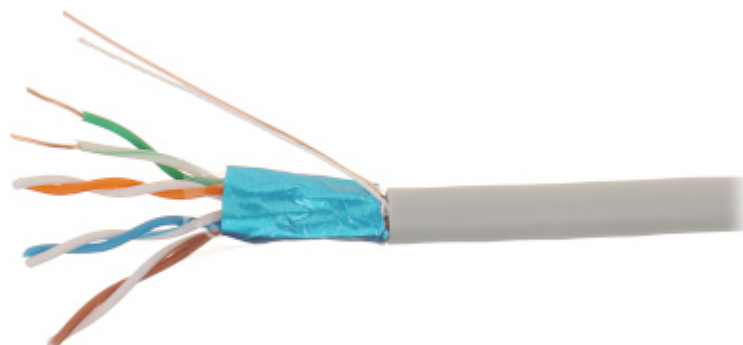

### SPECIFICATION

<b>In section:</b>	<b>305 m . Price for 1m when buying a whole roll</b>
Type:	FTP cat. 5e
Inner conductor:	Cu Wire
Resistance:	<ul style="list-style-type: none"><li>• 11.9 <math>\Omega</math> / 100 m (manufacturer data)</li><li>• 12.23 <math>\Omega</math> / 100 m (our tests result)</li></ul>
Shield:	Al foil
Outer coating:	PVC
Coating color:	Gray
Guarantee:	2 years

### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



## OUR TESTS

Insertion loss of 100 meters section (RF PWR OUT = 0 dBm):



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------