

Code: DS-2DE5230W-AE

IP SPEED DOME CAMERA OUTDOOR **DS-2DE5230W-AE** - 1080p 4.3 ... 129 mm Hikvision

Net: **4 235.25 PLN** Gross: **5 209.36 PLN**


IP camera with efficient H.264 / H.265 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

PoE powering possibility, compatible with the 802.3at standard makes the device more universal and easier to install.

For a few models of IP cameras working at $\geq 1920 \times 1080$ resolution we recommend to use of network with 1Gb/s bandwidth.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Progressive Scan CMOS
Matrix size:	2.1 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 960 - 1.3 Mpx 1280 x 720 - 720p
Scanning system:	Progressive
Lens:	4.3 ... 129 mm
View angle:	• 66 ° ... 2.1 ° (manufacturer data) • 59 ° ... 3.3 ° (our tests result)
Optical zoom:	x 30
Digital zoom:	x 16
Min. illumination:	• 0.05 Lux @ F1.6 (color), • 0.01 Lux @ F1.6 (B/W)
Video output:	
Preset rotation speed:	300 °/s (horizontal) 200 °/s (vertical)
Rotation speed (manual control):	0.1 °/s ... 250 °/s (horizontal) 0.1 °/s ... 150 °/s (vertical)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Horizontal rotation range:	360 ° continuous
Vertical rotation range:	-5 ° ... 90 °
RS-485 interface:	<input type="checkbox"/>
Number of presets:	300
Horizontal scan:	<input type="checkbox"/>
Route settings:	8
Image compression method:	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Bitrate:	32 ... 16384 kbps
Alarm inputs / outputs:	2 / 1
Audio:	<ul style="list-style-type: none"> • External microphone input, • Audio output, • Audio detection
Main stream frame rate:	25 fps @ 1080p
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, IEEE 802.1x, QoS, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTP, TCP, UDP, IGMP, ICMP, DHCP, PPPoE
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	20
ONVIF:	16.12
Memory card slot:	Micro SD memory cards up to 128GB support (possible local recording)
Main features:	<ul style="list-style-type: none"> • 3D-DNR - Digital Noise Reduction • ROI - improve the quality of selected parts of image • F-DNR (Defog) - Reduction of image noise caused by precipitation • D-WDR - Wide Dynamic Range • Parking action - this function enables to locate the camera to specific position automatically if operator doesn't operate the controller for some time • Configurable Privacy Zones - 8 • ICR - Movable InfraRed filter • BLC - Back Light Compensation • HLC - High Light Compensation (spot) • Sharpness - sharper image outlines • Mirror - Mirror image • Day/Night mode (color/b&w/auto) • Audio detection • Intelligent Image Analysis : crossing the line (tripwire), intrusion
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Darmowa aplikacja iVMS-4500 or Hik-Connect • iOS (iPhone): Darmowa aplikacja iVMS-4500 or Hik-Connect
Default IP address:	192.168.1.64
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application
Mobile client access ports:	8000
Port ONVIF:	80
RTSP URL:	<ul style="list-style-type: none"> • Main stream rtsp://192.168.1.64:554/Streaming/Channels/101/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/101/ - with authorization • Sub stream rtsp://192.168.1.64:554/Streaming/Channels/102/ - RTSP - without authorization rtsp://user:password@192.168.1.64:554/Streaming/Channels/102/ - with authorization



Power supply:	<ul style="list-style-type: none"> • PoE (802.3at), • 24 V AC / 2.2 A (power adapter included)
Power consumption:	≤ 22 W
Housing:	Speed Dome Metal
Color:	White
"Index of Protection":	IP66
Vandal-proof:	<input type="checkbox"/>
Operation temp:	-30 °C ... 65 °C
Weight:	2.9 kg
Dimensions:	Ø 220 x 305 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	301309545
Guarantee:	3 years

PRESENTATION


Bottom view:




Camera view after remove the Dome cover:



Memory card slot:

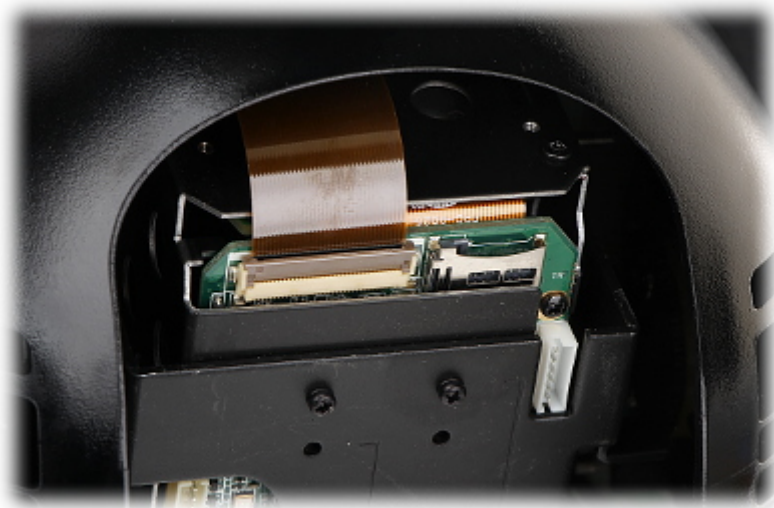

Connectors:

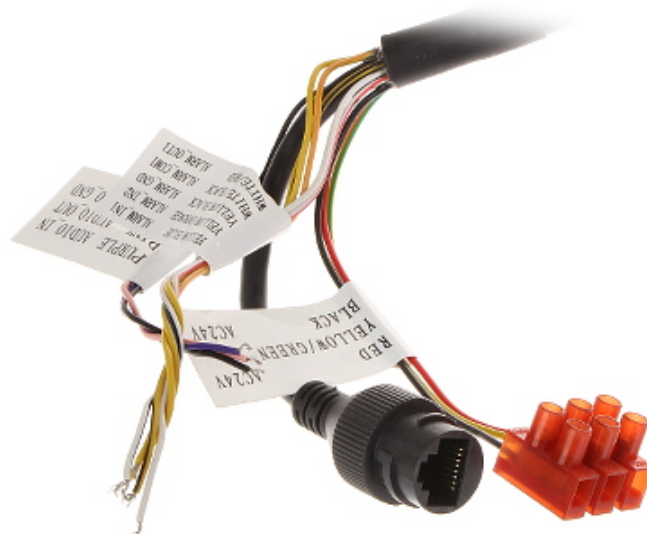

Connectors description:



In the kit:



OUR TESTS

Camera image at artificial illumination (about 30Lux):




Camera image at night conditions with external IR illuminator on:



Camera image at direct strong light opposite to camera:



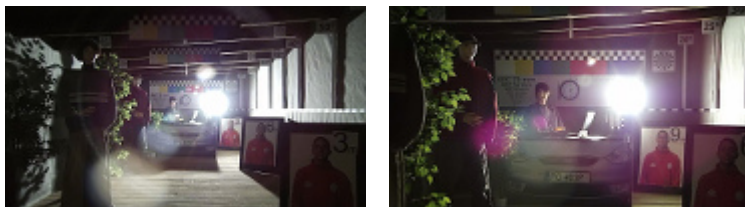

Camera image at night conditions, at different illumination values show below:

10 LUX:



1 LUX:



0.1 LUX:



0.01 LUX:



0.001 LUX:

