

Code: DHI-NVR2104HS-P-S2

## NVR **DHI-NVR2104HS-P-S2** 4 CHANNELS + 4-PORT POE SWITCH DAHUA

Net: **131.39 EUR** Gross: **131.39 EUR**



### SPECIFICATION

|                                  |                                                                                                                                                                                                      |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard:                        | TCP/IP                                                                                                                                                                                               |
| Supported resolutions:           | 4 @ 3072 x 2048 px,<br>4 @ 2592 x 1944 px,<br>4 @ 2560 x 1440 px,<br>4 @ 2048 x 1536 px,<br>4 @ 1920 x 1080 px,<br>4 @ 1280 x 720 px,<br>4 @ 704 x 576 px                                            |
| Video outputs:                   | 1 pcs HDMI<br>1 pcs VGA                                                                                                                                                                              |
| Audio support:                   | 4 Channels - Audio from cameras                                                                                                                                                                      |
| Audio inputs:                    | 1 pcs CINCH - External microphone input                                                                                                                                                              |
| Audio outputs:                   | 1 pcs CINCH                                                                                                                                                                                          |
| Image compression method:        | H.264                                                                                                                                                                                                |
| Maximal total frame rate:        | 100 fps @ 3072 x 2048 px,<br>100 fps @ 2592 x 1944 px,<br>100 fps @ 2560 x 1440 px,<br>100 fps @ 2048 x 1536 px,<br>100 fps @ 1920 x 1080 px,<br>100 fps @ 1280 x 720 px,<br>100 fps @ 704 x 576 px, |
| Supported hard drives:           | 1 x 6 TB SATA                                                                                                                                                                                        |
| Recording modes:                 | Manual, Motion Detection, Schedule                                                                                                                                                                   |
| Network protocols:               | HTTP, TCP/IP, IPv4/IPv6, RTSP, UDP, NTP, DHCP, DNS, IP Filter, DDNS, ONVIF 2.4                                                                                                                       |
| External storage devices backup: | Backup to USB drive (pendrive, external drive)                                                                                                                                                       |
| Default admin user / password:   | admin / admin                                                                                                                                                                                        |
| Default IP address:              | 192.168.1.108                                                                                                                                                                                        |
| Web browser access ports:        | 80, 37777                                                                                                                                                                                            |
| PC client access ports:          | 37777                                                                                                                                                                                                |
| Mobile client access ports:      | 37777                                                                                                                                                                                                |

|                                     |                                                                                                                                                                                                                                                                |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| RTSP URL:                           | rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream<br>rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream                                                                                |
| Searching and playback the records: | Records searching: by time and events type. Records playback: forward, backward, fast, slow<br>Advanced searching (to the one second accuracy)<br>All channels synchronous playback, Smart Search function                                                     |
| Bitrate:                            | max. 80 Mbps                                                                                                                                                                                                                                                   |
| Network functions:                  | Full support via network, Remote records copying, Web Server built-in<br>max. 128 on-line users                                                                                                                                                                |
| Switch PoE:                         | 4-port PoE Switch built-in, 25.5 W / Channel, PoE (802.3af/at)                                                                                                                                                                                                 |
| Mobile phones support:              | Port no.: 37777 or access by a cloud (P2P)<br>• Android: Free application <a href="#">DMSS</a> , Android: Free application <a href="#">IMOU</a><br>• iOS (iPhone): Free application <a href="#">DMSS</a> , iOS (iPhone): Free application <a href="#">IMOU</a> |
| Alarm inputs / outputs:             | —                                                                                                                                                                                                                                                              |
| PTZ control:                        | IP Speed Dome Cameras                                                                                                                                                                                                                                          |
| Motion Detection:                   | 22 x18 motion zones - after motion detection records detected channels only                                                                                                                                                                                    |
| Mouse support:                      | ✓                                                                                                                                                                                                                                                              |
| IR remote controller in the set:    | —                                                                                                                                                                                                                                                              |
| Power supply:                       | 48 V DC / 1.25 A (power adapter included)                                                                                                                                                                                                                      |
| Weight:                             | 0.870 kg                                                                                                                                                                                                                                                       |
| Dimensions:                         | 260 x 233 x 47 mm                                                                                                                                                                                                                                              |
| Supported languages:                | English, Bulgarian, Czech, Finnish, Greek, Polish, Romanian, Serbian, Slovenian, Hungarian                                                                                                                                                                     |
| Country of origin:                  | China                                                                                                                                                                                                                                                          |
| Manufacturer / Brand:               | DAHUA                                                                                                                                                                                                                                                          |
| Guarantee:                          | <b>3 years</b>                                                                                                                                                                                                                                                 |

## PRESENTATION

Front panel:





Rear panel:



In the kit:



Example captures of device interface:

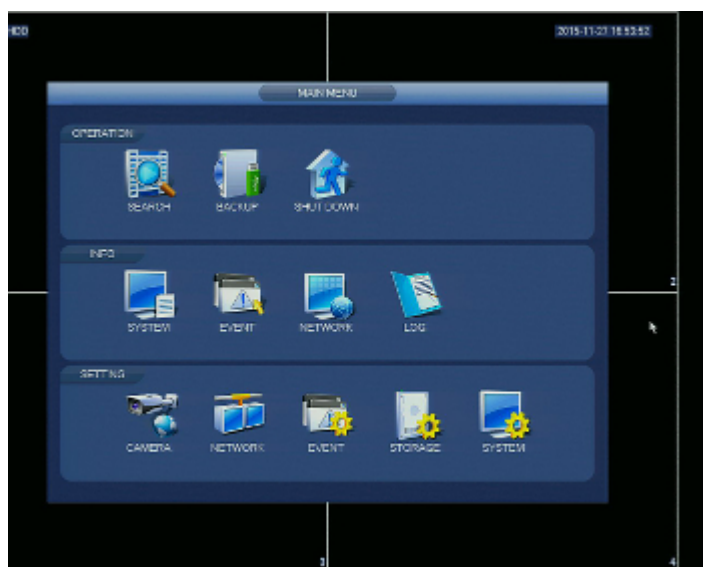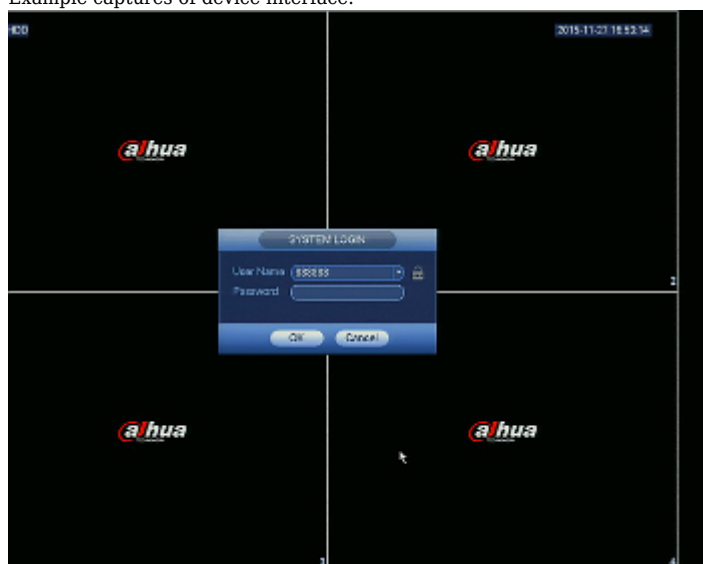

## OUR OPINIONS



- Audio transmission via network.

## PACKAGE

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

