

Code: DS-7108NI-K1/W/M(C)

## NVR **DS-7108NI-K1/W/M(C)** Wi-Fi, 8 CHANNELS Hikvision

Net: **178.24 EUR** Gross: **178.24 EUR**

The DS-7108NI-K1/W/M(C) digital recorder is a professional device using in IP surveillance systems. The H.265 / H.264 video compression standard using to record video data, allows to get the best possible quality of recorded image at minimal network transfer and disk storage capacity.

The built-in Wi-Fi module enables cooperation with wireless cameras that support the IEEE 802.11 b/g/n standards.



### SPECIFICATION

|                                     |                                                                                                                                                                                                                                                                                  |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard:                           | TCP/IP                                                                                                                                                                                                                                                                           |
| Supported resolutions:              | max. 4 Mpx - 2688 x 1520 px                                                                                                                                                                                                                                                      |
| Video outputs:                      | 1 pcs HDMI<br>1 pcs VGA                                                                                                                                                                                                                                                          |
| Audio support:                      | 8 Channels - Audio from cameras                                                                                                                                                                                                                                                  |
| Audio inputs:                       | —                                                                                                                                                                                                                                                                                |
| Audio outputs:                      | 1 pcs CINCH                                                                                                                                                                                                                                                                      |
| Image compression method:           | H.265+ / H.265 / H.264+ / H.264                                                                                                                                                                                                                                                  |
| Supported hard drives:              | 1 x 6 TB SATA                                                                                                                                                                                                                                                                    |
| Recording modes:                    | Manual, Motion Detection, Schedule                                                                                                                                                                                                                                               |
| Network protocols:                  | TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, UPnP                                                                                                                                                                                                                      |
| External storage devices backup:    | Backup to USB drive (pendrive, external drive)                                                                                                                                                                                                                                   |
| Searching and playback the records: | Records searching: by time and events type. Records playback: forward, backward, fast, slow                                                                                                                                                                                      |
| Bitrate:                            | max. 50 Mbps                                                                                                                                                                                                                                                                     |
| Network functions:                  | <ul style="list-style-type: none"><li>• Wi-Fi - IEEE 802.11 b/g/n, 2.4 GHz, 2x2 MIMO, 144 Mbps Baudrate</li><li>• Live image view, Playback the records, Backup the records - iVMS-4200 application</li></ul>                                                                    |
| ONVIF:                              | ✓                                                                                                                                                                                                                                                                                |
| Mobile phones support:              | Port no.: 8000 or access by a cloud (P2P) <ul style="list-style-type: none"><li>• Android: Free application <a href="#">iVMS-4500</a> or <a href="#">Hik-Connect</a></li><li>• iOS (iPhone): Free application <a href="#">iVMS-4500</a> or <a href="#">Hik-Connect</a></li></ul> |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                                  |                                                                                                                                                                                                                                         |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Default admin user / password:   | admin / -<br>The administrator password should be set at the first start                                                                                                                                                                |
| Default IP address:              | 192.168.1.64                                                                                                                                                                                                                            |
| Web browser access ports:        | 80                                                                                                                                                                                                                                      |
| PC client access ports:          | Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application                                                                                                                                                                       |
| Mobile client access ports:      | 8000                                                                                                                                                                                                                                    |
| RTSP URL:                        | <ul style="list-style-type: none"> <li>• rtsp://user:password@192.168.1.64:554/Streaming/Channels/channel_no01/ - Main stream</li> <li>• rtsp://user:password@192.168.1.64:554/Streaming/Channels/channel_no02/ - Sub stream</li> </ul> |
| Alarm inputs / outputs:          | —                                                                                                                                                                                                                                       |
| PTZ control:                     | IP Speed Dome Cameras                                                                                                                                                                                                                   |
| Motion Detection:                | ✓                                                                                                                                                                                                                                       |
| Intelligent Image Analysis:      | ✓                                                                                                                                                                                                                                       |
| USB:                             | 2 pcs USB 2.0                                                                                                                                                                                                                           |
| Mouse support:                   | ✓                                                                                                                                                                                                                                       |
| IR remote controller in the set: | —                                                                                                                                                                                                                                       |
| Operation temp:                  | -10 °C ... 55 °C                                                                                                                                                                                                                        |
| Power supply:                    | 12 V DC / 2 A (power adapter included)                                                                                                                                                                                                  |
| Power consumption:               | ≤ 10 W (without HDD)                                                                                                                                                                                                                    |
| Weight:                          | 0.9 kg                                                                                                                                                                                                                                  |
| Dimensions:                      | 260 x 246 x 48 mm                                                                                                                                                                                                                       |
| Supported languages:             | Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Italian   |
| Country of origin:               | China                                                                                                                                                                                                                                   |
| Manufacturer / Brand:            | Hikvision                                                                                                                                                                                                                               |
| SAP Code:                        | 303611924                                                                                                                                                                                                                               |
| Guarantee:                       | <b>3 years</b>                                                                                                                                                                                                                          |

## PRESENTATION

Front panel:




Rear panel:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



See how to mount a hard disk drive and configure the recorder:  
:  
In the kit:

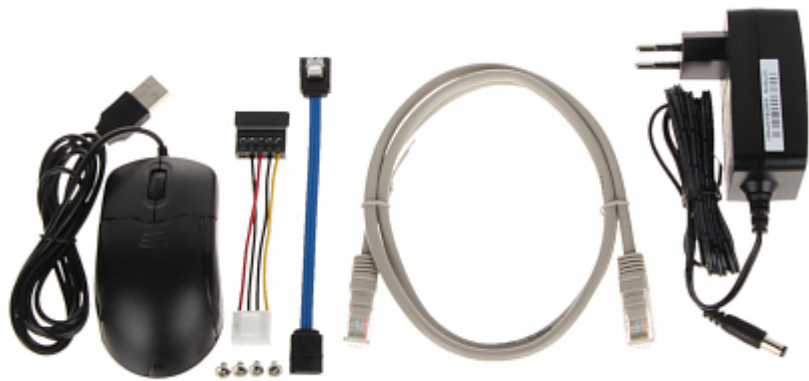

**PACKAGE**

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|