

Code: DS-7608NI-L1/W

NVR WITH MONITOR **DS-7608NI-L1/W** Wi-Fi, 8 CHANNELS Hikvision

Net: **485.22 EUR** Gross: **485.22 EUR**

The DS-7608NI-L1/W recorder will display images from all 8 cameras in the live view, switch to secondary streams.

The built-in Wi-Fi module enables cooperation with wireless cameras that support the IEEE 802.11 b/g/n standards.



SPECIFICATION

Standard:	TCP/IP
Supported resolutions:	max. 6 Mpx - 3072 x 2048 px
Video outputs:	1 pcs HDMI
Screen size:	11.6 "
Matrix type:	TFT LCD
Native resolution:	1366 x 768 px
Audio support:	• 8 Channels - Audio from cameras, • Bi-directional audio streaming support • Speakers built-in
Audio inputs:	1 pcs Jack 3.5 mm
Audio outputs:	1 pcs Jack 3.5 mm
Image compression method:	H.265+ / H.265 / H.264+ / H.264
Supported hard drives:	1 x 6 TB SATA
Recording modes:	Manual, Motion Detection, Schedule
Network protocols:	TCP/IP, DHCP, IPv4/IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP, HTTP, HTTPS
External storage devices backup:	Backup to USB drive (pendrive, external drive)
Searching and playback the records:	Records searching: by time and events type. Records playback: forward, backward, fast, slow Records playback from max. 4 channels in the same time

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Bitrate:	max. 60 Mbps
Network functions:	• Support up to 8 TCP/IP cameras including to 8 Wi-Fi cameras • Wi-Fi - IEEE 802.11 b/g/n, 2.4 GHz, 2x2 MIMO, 300 Mbps Baudrate • Live image view, Playback the records, Backup the records - iVMS-4200 application • 16 on-line users
ONVIF:	✓
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) • Android: Free application Hik-Connect • iOS: Free application Hik-Connect
Default IP address:	192.168.1.64
Default admin user / password:	admin / -
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application
Mobile client access ports:	8000
RTSP URL:	• rtsp://user:password@192.168.1.64:554/Streaming/Channels/channel_no01/ - Main stream • rtsp://user:password@192.168.1.64:554/Streaming/Channels/channel_no02/ - Sub stream
Alarm inputs / outputs:	—
PTZ control:	✓
Motion Detection:	✓
Intelligent Image Analysis:	✓
Main features:	Functions implemented in cooperation between the recorder and cameras that support these functions • IVS analysis : crossing the line (tripwire), intrusion • Motion Detection
Main features:	• TFT-LCD color matrix • 2 x Omnidirectional antenna Wi-Fi, External antenna with the SMA connector • 2x2 MIMO - MIMO technology - increases the throughput of wireless link (multiple antennas transmission) • Box casing designed to wall mounting
USB:	2 pcs USB 2.0
Mouse support:	✓
IR remote controller in the set:	—
Operation temp:	0 °C ... 40 °C
Power supply:	12 V DC / 1.5 A (power adapter included)
Weight:	1.33 kg
Dimensions:	300 x 230 / 407 (with antennas) x 48 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Ukrainian, Hungarian, Italian
Country of origin:	China
Manufacturer / Brand:	Hikvision
SAP Code:	303615690
Guarantee:	3 years

PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Rear view:






Internal view of the housing:

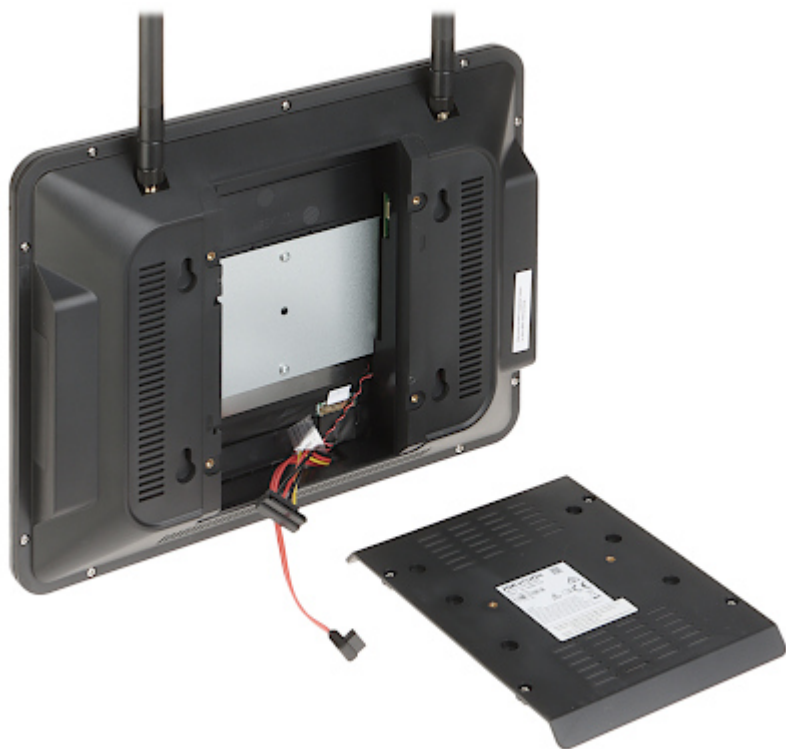

Connectors:

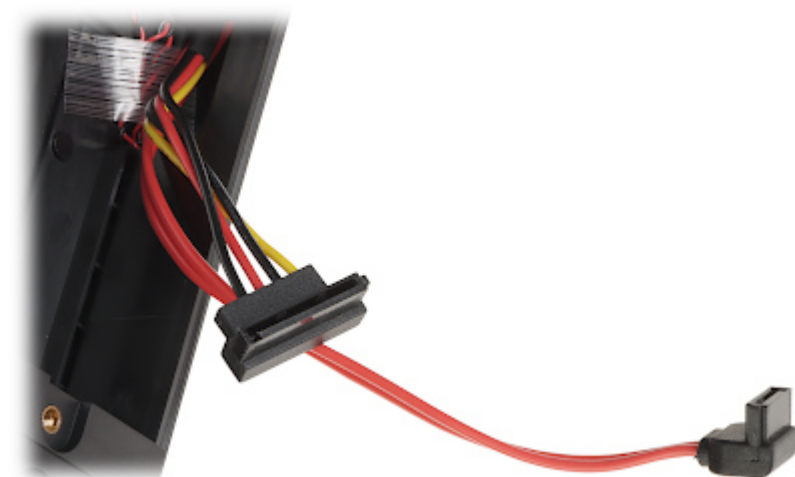



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60