

Code: DS-7716NXI-I4/16P/S(E)

NVR **DS-7716NXI-I4/16P/S(E)** 16 CHANNELS, 16 PoE ACUSENSE Hikvision

Net: **1 362.61 EUR** Gross: **1 362.61 EUR**

NVR equipped with advanced functions of intelligent image analysis.



SPECIFICATION

Standard:	TCP/IP
Supported resolutions:	max. 32 Mpx
Video outputs:	2 pcs HDMI 4K 1 pcs VGA 1 pcs CVBS There is a possibility to configure a SPOT function on one of the output
Audio support:	• 16 Channels - Audio from cameras • Bi-directional audio streaming support
Audio inputs:	1 pcs CINCH
Audio outputs:	1 pcs CINCH
Image compression method:	H.265+ / H.265 / H.264+ / H.264
Bitrate:	max. 160 Mbps
Supported hard drives:	4 x 10 TB SATA + 1 x eSATA
Recording modes:	Manual, Sensor, Motion detection, Schedule
External storage devices backup:	Backup to USB drive (pendrive, external drive)
Searching and playback the records:	Records searching: by time and events type. Records playback: forward, backward, fast, slow Advanced searching (to the one second accuracy) Smart Search function Smart Playback function Records playback from max. 16 channels in the same time @ 1080p 1/4/6/8/9/16 channel synchronous playback
Network interface:	1 x RJ-45 10/100/1000 Base-TX
Network functions:	• Live image view, Playback the records, Backup the records • max. 128 on-line users - iVMS-4200 application
Network protocols:	TCP/IP, DHCP, IPv4/IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP, HTTP, HTTPS
ONVIF:	✓
Default IP address:	192.168.1.64
Default admin user / password:	admin / - The administrator password should be set at the first start
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) Android: Free application Hik-Connect iOS: Free application Hik-Connect

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Web browser access ports:	80, 8000
PC client access ports:	8000
Mobile client access ports:	8000
RTSP URL:	• rtsp://user:password@192.168.1.64:554/Streaming/Channels/channel_no01/ - Main stream • rtsp://user:password@192.168.1.64:554/Streaming/Channels/channel_no02/ - Sub stream
USB:	2 pcs USB 2.0 1 pcs USB 3.0
Serial ports:	2 pcs RS-485 1 pcs RS-232
Alarm inputs / outputs:	16 / 9
PTZ control:	• IP Speed Dome Cameras • RS-485 - PELCO-D/P and others
Motion Detection:	2.0
Intelligent Image Analysis:	✓
Main features:	• NVR from the AcuSense series • Intelligent Image Analysis : crossing the line (tripwire), intrusion, Face recognition, Motion detection with human/vehicle silhouette recognition, Deep Learning technology • Filtering of false alarms based on the recognition of persons and vehicles • Comparison of faces with images from the database • supports 4 types of facial attributes extraction • Support for up to 16 face databases, including 50 000 face images • Smart search for a person based on a face photo • Cooperation with POS (Point of Sale) terminals • Power outputs : 12 V DC / 1 A, 12 V DC / 0.5 A (controlling) Functions implemented in cooperation between the recorder and cameras that support these functions : • ANPR • people counting
Mouse support:	✓
IR remote controller in the set:	—
Switch PoE:	16-port PoE Switch built-in, 25.5 W / Channel - PoE (802.3af/at)
Maximum total switch load:	200 W
Power supply:	100 ... 240 V AC / 50 ... 60 Hz
Power consumption:	max. 30 W (without HDD)
Operation temp:	-10 °C ... 55 °C
Weight:	4.57 kg
Dimensions:	440 x 402 x 75 mm, RACK 19", 1.5U
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, Finnish, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Ukrainian, Hungarian, Italian
Manufacturer / Brand:	Hikvision
SAP Code:	303618604
Guarantee:	3 years

PRESENTATION

Front panel:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Rear panel:



See how to mount a hard disk drive and configure the recorder:

:

In the kit:

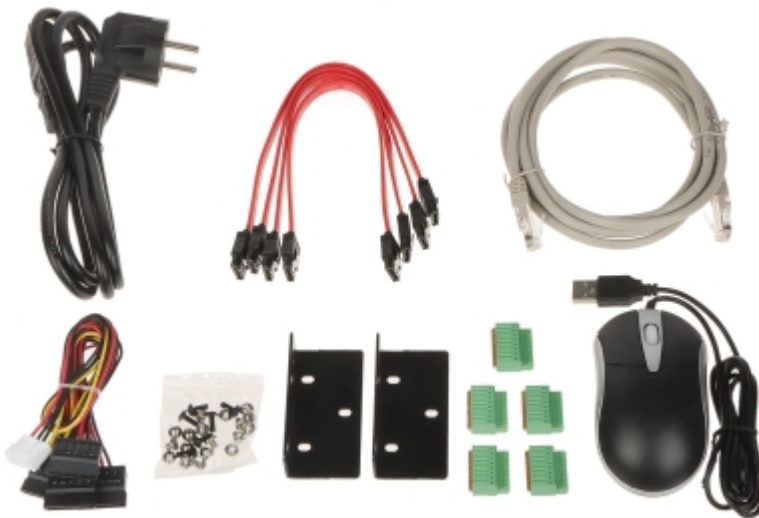

OUR OPINIONS



- The DS-7716NXI-I4/16P/S(E) is equipped with USB 3.0 port allowing to fast records backup.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60