


Code: KN-CA38*P20

SIDE MAGNETIC CONTACT **KN-CA38*P20**

Net: **25.95 EUR** Gross: **25.95 EUR**

The magnetic contacts can be used wherever required for controlling the status of doors, windows and/or other movable elements, e.g. for protection or monitoring of access to particular sites, spaces, facilities, in automatic control systems, etc.

The contact is designed for surface mounting.

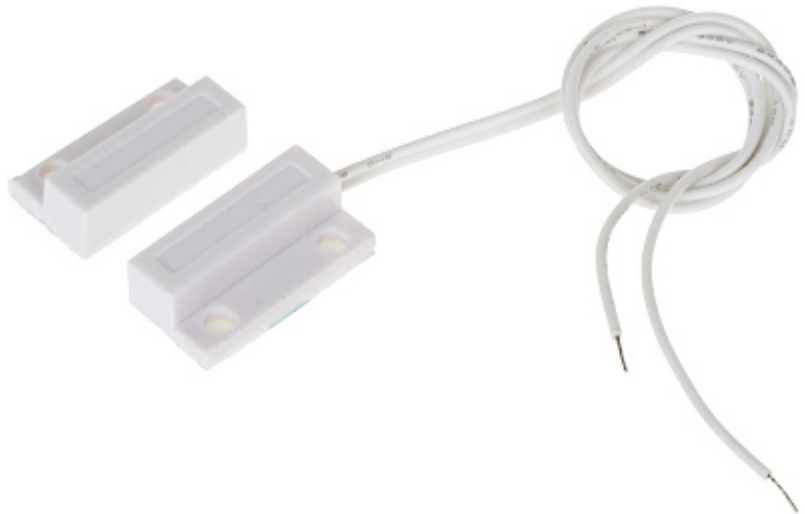


SPECIFICATION

In package:	20 pcs The price for package
Detection:	Opening the door or window
Maximum reed switched voltage:	20 V
Maximal switched current:	20 mA
Make distance:	14 mm
Break distance:	18 mm
Main features:	• Plastic (ABS) • NC output - a magnet close to a reed switch - does not trigger an alarm, the contacts are closed • Length of the cable : 25 cm • Leads out the cables : On the short edge
Color:	White
Weight:	0.01 kg
Dimensions:	27 x 14 x 8 mm
Guarantee:	2 years

PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

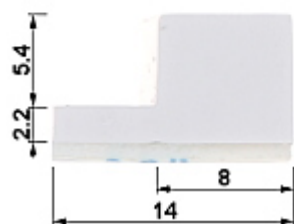

2.5 Magnetic head

100VDC/2A

Internal normally open and closed magnetic Max. operating voltage/current/power 0.2A/3W

Strong electric door 220V, 50W, 0.5A

The load which is not contacts should be broken down by factory call...

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

