


Code: XD-2L-BR

MULTIPURPOSE WIRED DETECTOR **XD-2L-BR** SATEL

Net: **32.43 EUR** Gross: **32.43 EUR**

The XD-2L-BR wired detector can work in one of the 4 modes, which makes it an extremely universal device. Depending on your needs, the device can be configured as: magnetic detector, shock detector, shock detector with reed switch or water flood detector (FPX-1 external probe required - available separately).

The XD-2L-BR works with any alarm control panel.

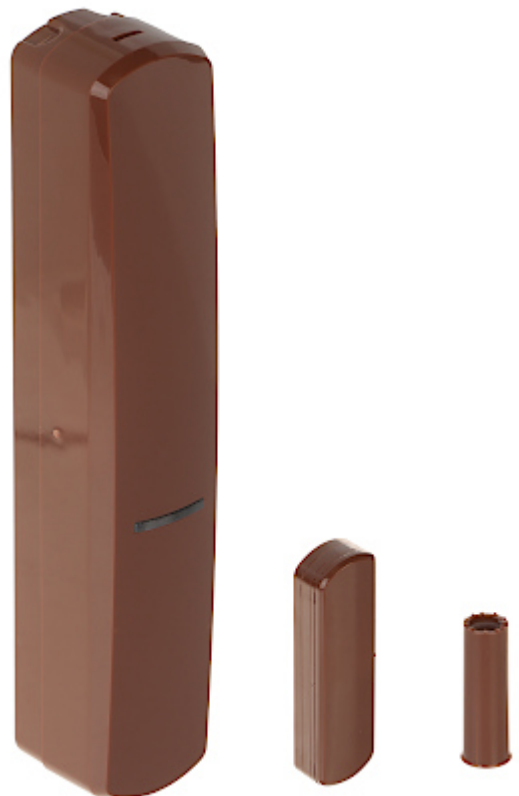

SPECIFICATION

Support:	Alarm control panel
Detection:	Opening the door or window, Vibrations, Water
Environmental class EN 50130-5:	II
Protection class (Grade):	2
Sensitivity adjustment:	Applies to the shock detector
Alarm signaling:	LED indicator, Signal to control panel
Relay contacts rating (resistive load):	40 mA / 24 V DC
Power supply:	12 V DC / 15 mA (max)


Main features:	• Operation modes : - Magnetic detector - Opening the door or window - Maximum distance between detector and magnet : 15 mm (surface magnet), 19 mm (recessed magnet) - input for connecting a NC type wired detector - 1 Alarm output - Shock detector - Detection of shocks and vibrations associated with attempts to force a door or window - Range : 3 m - input for connecting a NC type wired detector - 1 Alarm output - Shock and magnetic detector - Detection of shocks and vibrations associated with attempts to force a door or window - Opening the door or window - input for connecting a NC type wired detector - 1 / 2 Alarm outputs - Water flood detector - The required FPX-1 probe is available separately - detecting the presence of water in spaces where there is a risk of leakage - 1 Alarm output • Alarm output : 2EOL/NC, NC • Built-in parametric resistors 2EOL: 2 x 1.1kΩ, 2 x 2.2 kΩ, 2 x 4.7 kΩ, 2 x 5.6 kΩ, 2 x 6.8 kΩ • LED indication - Remote configuration • Supply voltage control • Tamper detection - opening the enclosure • 2 magnets included (for surface and flush mounting) • Compliance with EN 50130-4, EN 50130-5, EN 50131-1, EN 50131-2-6 standards
Color:	Brown
Operation temp:	-10 °C ... 55 °C
Weight:	0.04 kg (detector)
Dimensions:	• 25 x 136 x 29 mm (detector) • 15 x 52 x 6 mm (surface magnet) • Ø 10 x 28 mm (recessed magnet)
Manufacturer / Brand:	SATEL
Guarantee:	2 years

PRESENTATION


Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

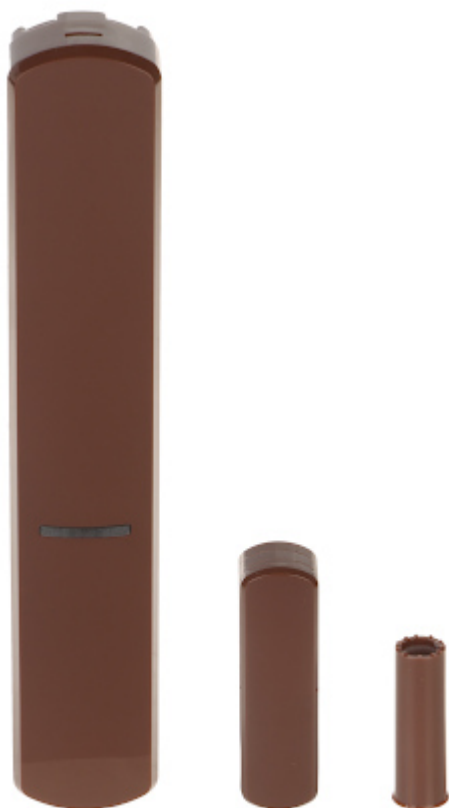

Internal view of the housing:

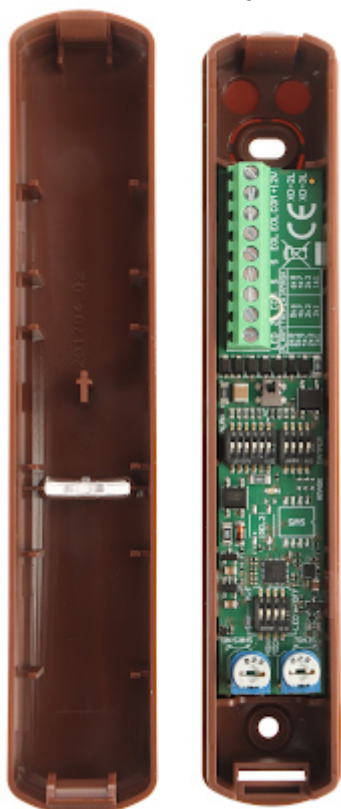

Mounting side view:



In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60