

Code: MAGENTA

ACOUSTIC GLASSBREAK DETECTOR **MAGENTA** SATEL

Net: **16.30 EUR** Gross: **20.05 EUR**



Sensor signals an alarm on registering a low-frequency tone (impact sound), followed by a high-frequency tone (sound of broken glass). The sensor starts to analyze a high-frequency channel after receiving the low-frequency sound wave, caused by the impact.

Detection by the microphone the impact sound wave is indicated by LED blink. The high-frequency channel is analyzed for 4 seconds. If during this time the high-frequency tone (sound of broken glass) is detected, the detector will trigger an alarm.

SPECIFICATION

Detection:	Glass break detector
Range:	max. 6 m
Environment class:	II
Sensitivity adjustment:	✓
Alarm signaling:	LED indicator, Signal to control panel
Relay contacts rating (resistive load):	40 mA / 16 V DC
Power supply:	12 V DC / 10 mA
Main features:	<ul style="list-style-type: none">• detection of breaking plate, laminated or tempered glass• Advanced dual-path microprocessor signal analysis• trimmer sensitivity adjustment
Color:	White
Operation temp:	-10 °C ... 55 °C
Weight:	0.04 kg
Dimensions:	24 x 110 x 27 mm
Manufacturer / Brand:	SATEL
Guarantee:	2 years


PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

View after remove the cover:



Description of particular elements of the device:

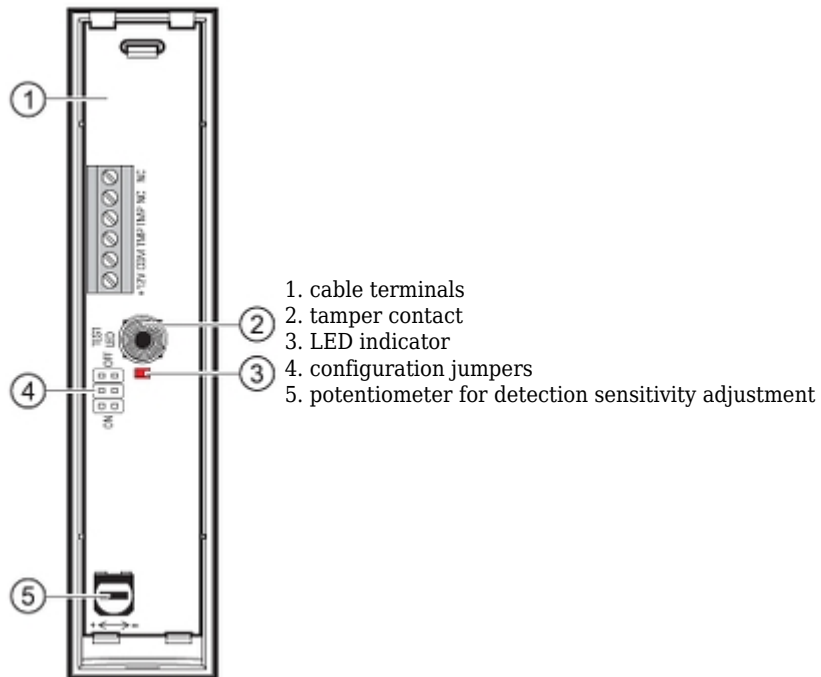

Mounting side view:



In the kit:

