

Code: ASP-200-R/IT

WIRELESS OUTDOOR SIREN **ASP-200-R/IT** ABAX/ABAX2 SATEL

Net: **286.72 EUR** Gross: **286.72 EUR**

Outdoor, wirelessly triggered opto-acoustic siren designed to use in burglary and robbery signaling systems. Optical signaling source are LEDs, and acoustical signaling is generating by piezo transducer.

The device powered by the BAT-ER-3,6 powerful battery with a capacity of 13 Ah and a high temperature range. High-impact polycarbonate enclosure, featuring a very high mechanical strength and guarantees aesthetic appearance of siren even after many years of using. Construction enables high level of tamper protection (against opening and removing from mounting surface).

The ASP-200-R/IT supports the other devices compatible with wireless ABAX/ABAX2 system.

Attention! The device does not work with the ACU-100, ACU-250, ARU-100, INTEGRA-128-WRL.



SPECIFICATION


Support:	ABAX/ABAX2
Sound pressure level:	105 dB
Main features:	• Optical and acoustic signaling is triggered independently, by radio • Tamper protection (detection of removing from mounting surface and enclosure opening) • Remote configuration • Selection of 4 different acoustic signals • The advanced radio system ensures optimized communication with low current consumption • Radio communication range (at open area) : max. 500 m @ ABAX max. 2000 m @ ABAX2 • Remote configuration • Remote update of module software • battery diagnostics • Light and durable construction
Color:	Red
Power supply:	Battery BAT-ER-3,6 (ER34615) 13 Ah
Maximal current consumption:	480 mA
Backup time:	2 years
Operation temp:	-40 °C ... 55 °C
Weight:	0.8 kg
Dimensions:	148 x 254 x 64 mm
Manufacturer / Brand:	SATEL

Guarantee:

2 years

PRESENTATION

Internal view:

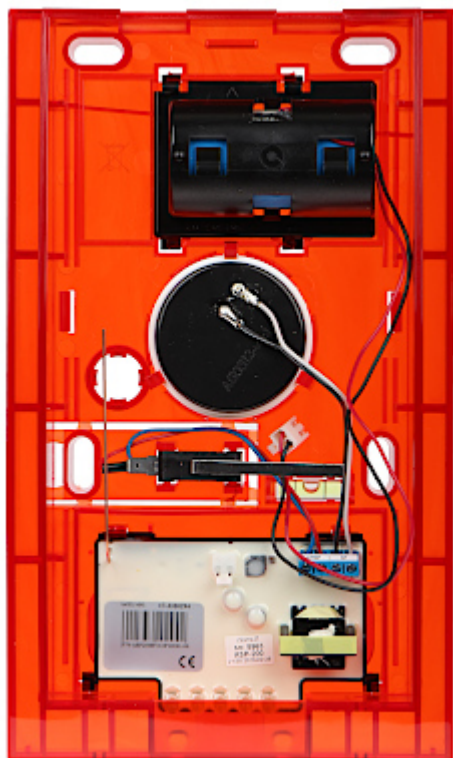

Mounting side view:



In the kit:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

