

Code: AWS-1141

## ANTENNA AMPLIFIER **AWS-1141** 21dB

Net: 101.96 PLN Gross: 125.41 PLN

The AWS-1141 is used to TV signal distribution in home antennas installations. Gain adjustment allows to set the right level of signal in whole installation. Amplifier can be powered directly from included power adapter or via output with using a separator.





### SPECIFICATION

Frequency range:	87 MHz ... 790 MHz
Number of inputs/outputs:	1 / 1
Input/output impedance:	75 $\Omega$
Connectors type:	"F"
Gain :	19 dB / 22 dB (&plusmn; 1.5) dB
Gain adjustment:	0 dB ... 10 dB (+/- 1dB)
S/N ratio:	3 dB
Maximum output level:	106 dB $\mu$ V
IMA3 60dB:	100 dB $\mu$ V
IMA2 60dB:	87 dB $\mu$ V
Return loss:	10 dB
Pre-amplifiers powering:	✓
Operation temp:	-25 °C ... 55 °C
Power supply:	12 V DC / 150 mA
Guarantee:	2 years


### PRESENTATION

Connectors:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

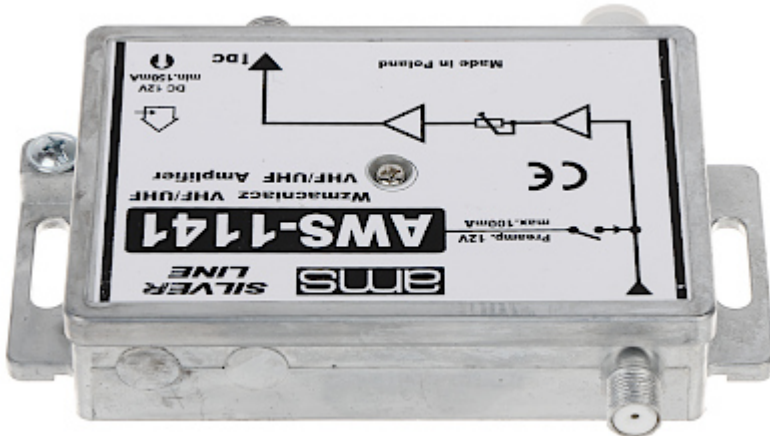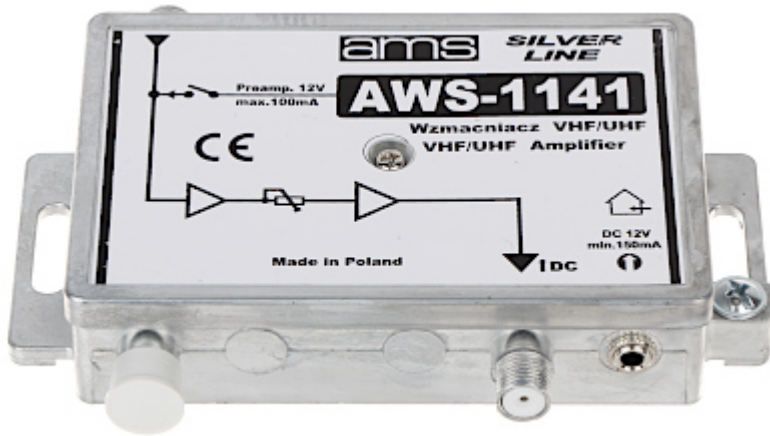

Top view:

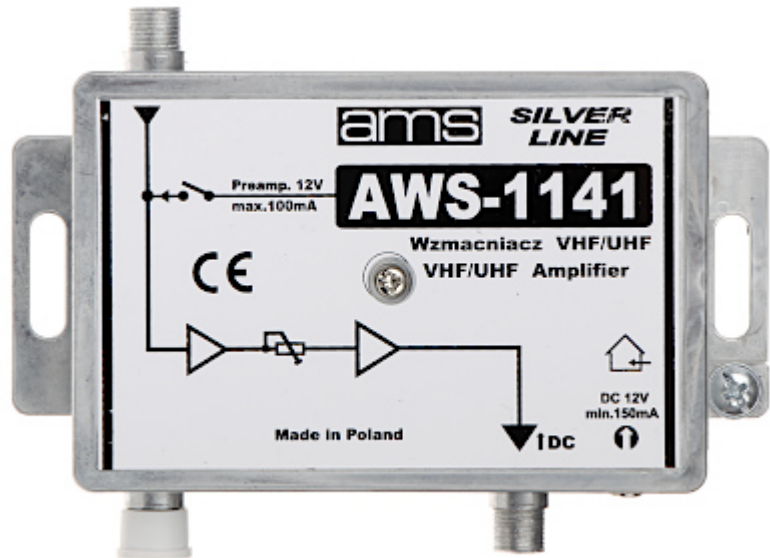

Internal view of the housing:

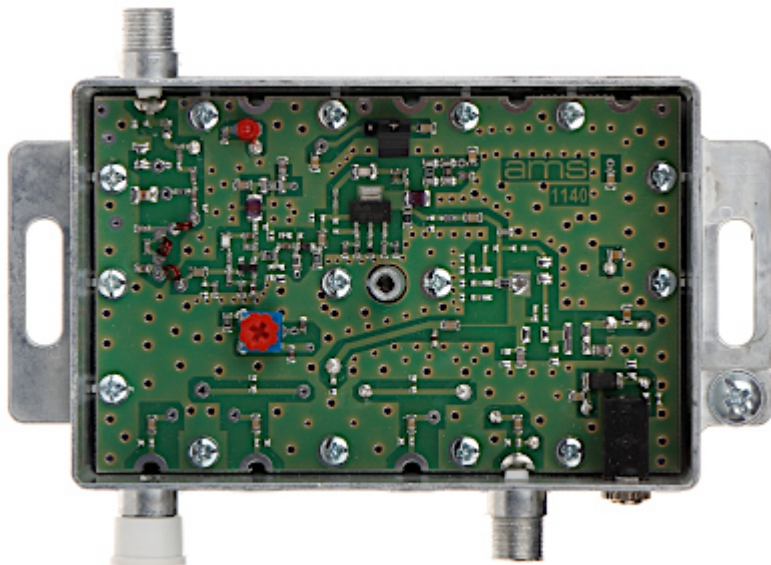

In the kit:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------