


Code: CA-5-P

ALARM CONTROL PANEL **CA-5-P** SATEL

Net: **45.80 USD** Gross: **56.33 USD**

The CA-5-P control panel is intended for security of small facilities which do not require future expansion options of the system. The control panel can cooperate with external GSM/GPRS communication modules.

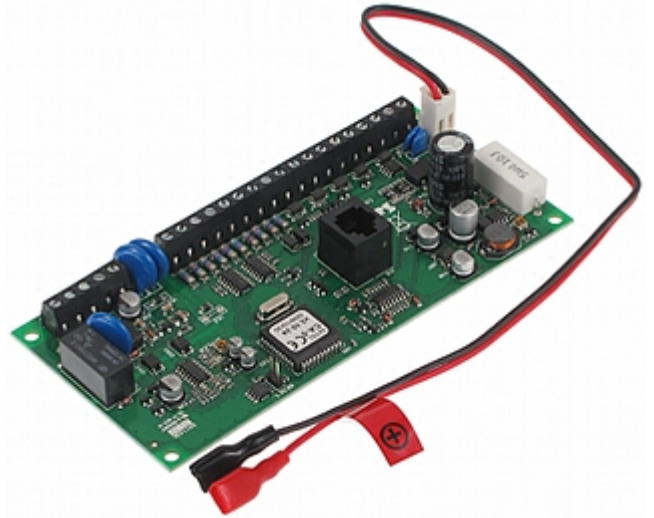

SPECIFICATION


Mainboard inputs:	5 pcs
Mainboard outputs:	3 pcs
Maximal number of supported inputs:	5 pcs
Maximal number of supported outputs:	3 pcs
Current-carrying capacity, low-current programmable outputs:	50 mA
Current-carrying capacity, high-current programmable outputs (+/-10%):	1.1 A - 1 pcs
Maximal load:	1.2 A
Users + admins:	5 + 1
Partitions:	—
Zones:	—
Expansion modules:	—
Events memory:	255
Timers:	—
Supported keypads:	max. 3
Supporting the wireless ABAX system via bus:	—
Keyboard included:	—
Enclosure included:	—
Protection class (Grade):	—
Power supply:	18 V DC
Operation temp:	-10 °C ... 55 °C
Permissible relative humidity:	93 %
Dimensions:	147 x 70 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Weight:	0.15 kg
Manufacturer / Brand:	SATEL
Guarantee:	2 years

PRESENTATION

Control panel mainboard view:

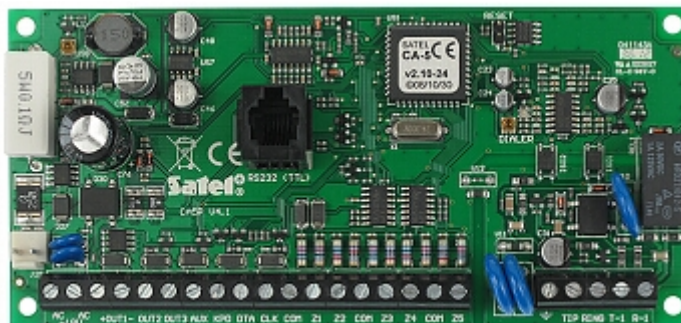

In the kit:

