

Code: PSDC-08128

SWITCHING ADAPTER **PSDC-08128**

Net: **99.48 EUR** Gross: **99.48 EUR**

Power adapter is equipped with aesthetic, solidly made metal casing box. Power adapter output voltage is DC 12V. It allows to connect up to 8 devices. Maximal load for the one output is 1A, but you should remember the total load for all outputs must be lower than 8A. Each output is protected independently with glass or PTC polymer fuse (jumper selection). Please pay attention for proper cooling conditions of the power adaptor during work!



SPECIFICATION

Adapter type:	Switching
Output voltage:	12 ... 15 V DC
Output voltage adjustment:	✓ By potentiometer
Max. output current (total):	8 A
Max. output current for single output:	1 A
Outputs protection:	1 A Polymer / Glass Fuse
LED indication:	✓
AW output (fault) - OC type 50mA, LED indication of at least one output fault:	✓
Protection:	<ul style="list-style-type: none">• Short-circuit• Overvoltage• Overload• Overvoltage• Tamper
Input voltage:	176 ... 264 V @ 50Hz
Power:	120 W (max)
Number of outputs:	8
Connector type:	Cable terminals
Housing type:	Metal, wall-mounted
Key closed:	—
Operation temp. / Relative humidity:	-10 ... 50 °C / 20 ... 90 %
Weight:	2 kg
Dimensions:	280 x 256 x 58 mm
Manufacturer / Brand:	PULSAR

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Guarantee:


2 years

PRESENTATION

Front view:




Front panel view:

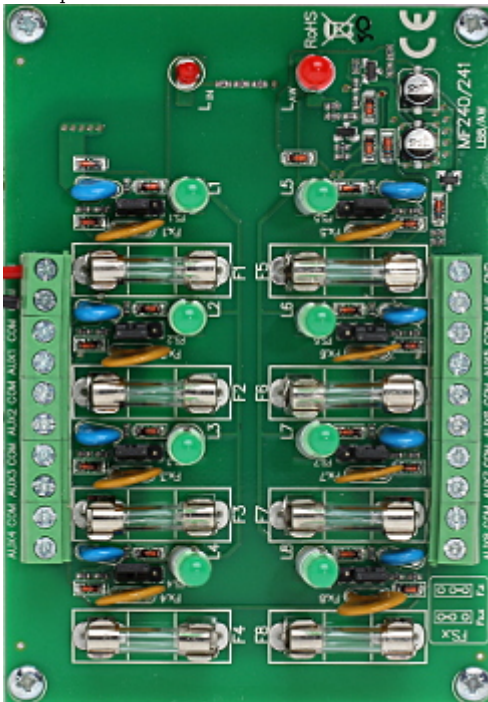



Dimensions:

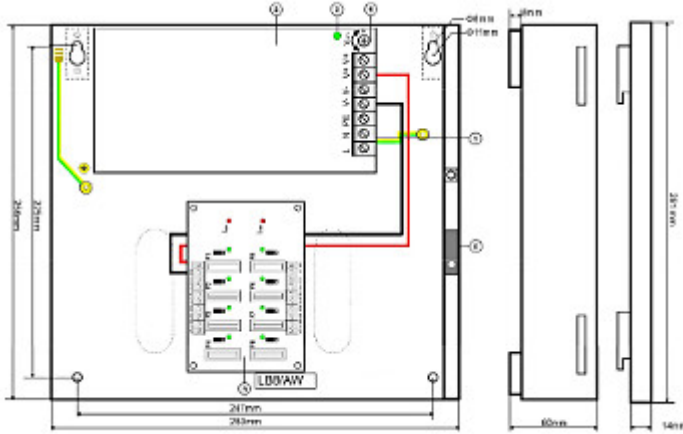

Rear view:



In the kit:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

