

Code: DRP-012V100W-1AA

SWITCHING ADAPTER **DRP-012V100W-1AA**

Net: **58.62 EUR** Gross: **58.62 EUR**

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).



SPECIFICATION

Adapter type:	Switching
Power voltage:	86 ... 264 V AC
Output voltage:	12 V DC
Output voltage adjustment:	11 ... 14 V
Voltage tolerance:	± 2 %
Maximal load:	8.33 A
Output power:	100 W
Number of outputs:	2 pcs
Efficiency:	87.5 %
Housing type:	DIN
MTBF (Mean Time Between Faults):	800000 hours
Vibration resistance:	IEC60068-2-6, 10 ... 150 Hz max. 5 G for 90 minutes
Protections:	<ul style="list-style-type: none">• Short-circuit• Overvoltage• Overload protection
Operation temp. / Relative humidity:	-20 °C ... 75 °C / < 95 %
Weight:	0.66 kg
Dimensions:	50 x 121 x 119 mm
Guarantee:	5 years

PRESENTATION

Front panel:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Rear panel (DIN rail installation):



Side view:

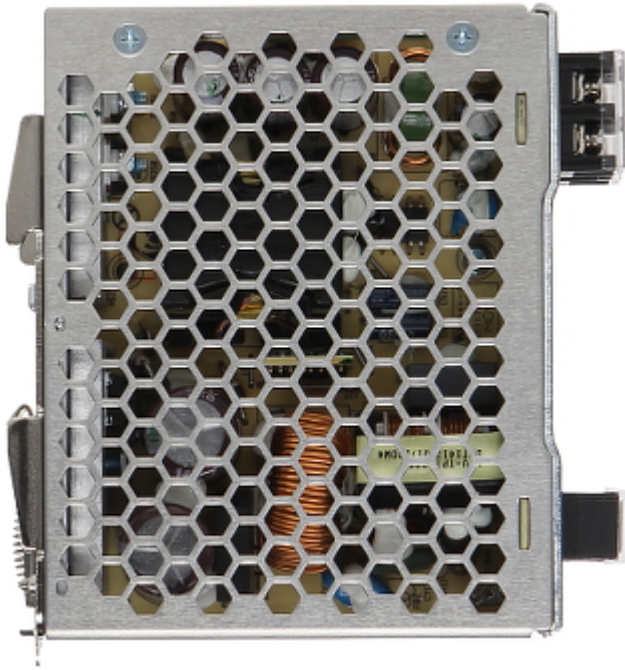

Dimensions:

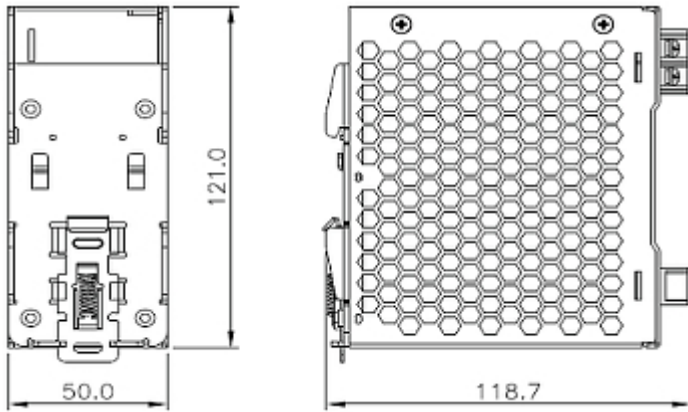

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60